


2018/2019 SDEC IEICATION DED



Range LOOK BOOK

With a history that dates back to 1857, Kährs of Sweden is the oldest wood floor manufacturer in the world still in operation. For decades, Kährs has been a global leader with innovations that include the world's first patented multi-layer wood floor in 1941; the world's first water-based finishing system in 1984, and the first ISO 14001 environmental management certification in 1997.

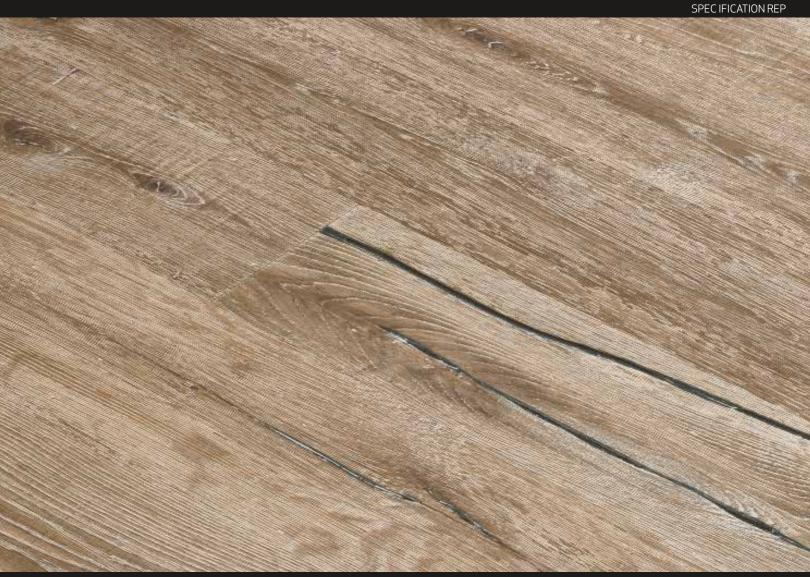

## **QUALITY IN WOOD SINCE 1857**

Wood is the most eco-friendly, beautiful and versatile flooring material there is. That's why we only work with wood. Few materials can add as much warmth and atmosphere as wood. It softens the most minimalistic designs, while accentuating the mood of a more traditional interior. While trends may come and go, quality and true style never goes out of fashion. That's why a wood floor from Kährs will always be the perfect choice.

## SEASONS GREETINGS



Compared to a traditional solid wood floor, our patented construction is 75% more stable. A Kährs floor resists warping, buckling and cracking, even as temperature and humidity change throughout the seasons. The construction creates a perfectly balanced wood floor that can tolerate even the most dramatic climate changes. Making our wood floors the perfect partner for underfloor heating.

### **GAP FREE**

When Kährs launched Woodloc® in 2000 – the first glue-free joint system in the world – it revolutionized the wood flooring industry. This ingenious joint system locks the boards together mechanically, creating a completely gap-free floor.





# THE EASIEST INSTALLATION

Kährs floors are easy to install, thanks to the ingenious Woodloc® joint. The boards lock together mechanically, with virtually invisible joints, providing perfect results, fast! The superior fit also enhances the floor's performance and durability.




## MORE THAN A BEAUTIFUL SURFACE

Whichever surface treatment you choose for your Kährs floor, you can be sure that it will both enhance and protect the natural beauty of the wood. All Kährs surface treatments are naturally free from solvents, formaldehyde and isocyanate. They also make the floor really easy to clean and maintain.



### **ENDLESS DESIGN VARIATIONS**

Whatever the size of room or interior style, there's a Kährs floor that will enhance the space. Our wood floors come in many wood species, sizes, patterns and finishes.



## SANDS LIKE A SOLID

The Kährs multi-layer construction uses hardwood down to the joint only, with fast-growing timber below. It can be refurbished in exactly the same way as a solid floor.



## **UNDERFLOOR HEATING**

Kährs wood floors are ideally suited to underfloor heating. Please visit www.kahrs.com for detailed installation and operating instructions.



## LEED.



Many of Kährs products contribute to LEED (Leadership in Energy and Environmental Design) points on construction projects. Please contact your local Kährs representative for the latest LEED information or visit www.kahrs.com.

### THE FINISHING TOUCH

It's in the detail that you'll see the level of skill and craftsmanship that goes into every product made by Kährs. Choose from a wide range of moldings and accessories, that are designed to add the perfect finishing touch.



## BEAUTY WITH A CONSCIENCE

Choosing a wood floor is a great way of being environmentally responsible. By choosing a Kährs floor vou are making a smarter, greener choice. Kährs is one of the oldest producers of wood flooring in the world - and the most innovative. During the last century, our many inventions have transformed the production of wood floors globally. Throughout this time, we've continued to capture the beauty and expression of wood. We combine its natural character with cutting edge innovation, to produce the highest quality wood flooring.

#### **GREEN PRODUCT**

The multi-layer wood floor, that we invented in 1941, proved not only to be the best and most stable flooring on the market; it was also the most environmentally friendly construction. It optimizes the use of the raw material, is made from renewable resources and is recyclable.



LESS RAW MATERIAL

Our multi-layered construction allows us to use the raw material more effectively, utilizing the whole log.



### **SOLVENT FREE**

We constantly strive to find the most environmentally friendly, solvent-free stains and finishes. Also, our surfaces are easy to keep clean, without the need to use harsh chemicals.

### **GREEN PRODUCTION**

Our production process is designed to have minimal impact on the environment. Over the years, Kährs has introduced a number of manufacturing and flooring innovations that have enabled a more responsible, green production. We work hard to reduce our impact on nature, in terms of air quality, water discharge and noise control, to the benefit of our employees and neighbors.



## **HEALTHY PRODUCTION HEALTHY FLOOR**

In 1984, Kährs was the first wood flooring manufacturer to utilize a water-based finishing system to reduce emissions. Kährs meets European E1, Eo and California Air Resources Board - Airborne Toxic Control Measure (CARB-ATCM) Phase 1 and 2 standards.



### NOTHING IS WASTED

At our production plant in Nybro, nothing goes to waste. The portion of the logs that we're not able to use for floor production are turned into biofuel. Some of this fuel is used to heat our own facilities. The rest goes to a local energy company. About 45,000 people in our neighborhood enjoy the warmth of our recycled wood.

### A GREEN MINDSET

Environmental, Social, Governance (ESG) and Corporate Social Responsibility (CSR) matters impact the communities where Kährs operates. We have made a public commitment to incorporate these ethical principles into the way we behave locally and globally.

Our commitment to the environment starts with the selection of the best raw material. This is achieved with the support of our 3000+ timber suppliers who share in our commitments.



## PLANTING AHEAD

Kährs is working with local, national and global organizations to ensure the forest stock is sustainable for generations to come. In Sweden, the total forest volume is 60% larger today than it was in the 1920's. Kährs is working with leading global programs, reforestation programs and leading environmental groups to support globally responsible forestry.

## **ENVIRONMENTAL STANDARDS**

Since the 1990's, Kährs' operations have been environmentally and quality certified. We have also been publishing a transparent and independent environmental audit results from EMAS since 1997. EMAS is the voluntary environmental regulation within the EU. Its purpose is to promote environmental control, environmental improvements, and environmental audits within industry.

Many of Kährs' products contribute to LEED (Leadership in Energy and Environmental Design) points on construction projects.















Many of Kährs products contribute to LEED (Leadership in Energy and Environmental Design) points on construction projects. Please contact your local Kährs representative for the latest LEED information or visit www.kahrs.com.



### KÄHRS PRODUCTS - POTENTIAL LEED CONTRIBUTERS

## LEED 2009

New Construction and Major Renovations

#### **MR Credit 4** (Recycled Content)

Linnea Spirit

#### MR Credit 5.2 (Regional Materials)

Kährs branded underlayments (see representative for details)

#### **MR Credit 7:** (Certified Wood)

FSC: See FSC running line products FSC: Contact Kährs representative for special order requirements

#### **IEQ 4.3** (Low Emitting Materials)

Floorscore: all 7, 13, 15, 30 mm products Eco+ Underlayment

### IEQ 4.4 (Composite Wood - NAUF)

NAUF: available special order, certain restrictions apply

## LEED v4

**Building Design and Construction** 

## MR cr 2 (Building Product Disclosure: Environmental Product Declarations)

All Kährs European manufactured products Eco+ Underlayment

## MR cr 3 (Building Product Disclosure: Sourcing of Raw Material)

Third-party verified corporate sustainability reports (CSR) which include environmental impacts of extraction operations and activities associated with the manufacturer's product and the product's supply chain, are valued as one whole product for credit achievement calculation. Kährs EMAS-Sustainability Report (all Kahrs European manufactured products)

Wood products must be certified by the Forest Stewardship Council or USGBC-approved equivalent. Products meeting wood products criteria are valued at 100% of their cost for the purposes of credit achievement calculation. Kährs DNV-CoC-000027 (All Kahrs European manufacturered products)

## **Building Product Disclosure: Material Ingredients**


Floorscore Certification: All 7, 13, 15, 30 mm products

## IEQ cr 2 (Low-Emitting Materials)

NAUF: available special order, certain restrictions apply

## KÄHRS FLOOR GUIDE

Kährs offers a wide range of products with different finishes to meet the most diverse needs. All Kährs finishes' are created by nature, engineered with the latest technology and produced with great respect for the environment.



NATURAL OIL

easy to maintain.

#### MATTE FINISH

Kährs oil reinforces the natural Our matte finish creates the look and is incredibly tactile. The impression that the floor is made oil brings out the fine structure from untreated bare wood. The and grain of the timber yet adds soft to touch natural surface is depth to the natural wood tone. incredibly tactile and pleasing Kährs floors treated with oil are underfoot. Matte finish is durable and easy to maintain.



#### SILK MATTE FINISH

Our silk matte finish complements the wood's character by emphasizing its natural structure. Making the floor durable and easy to clean, without concealing wood's natural luster.



#### HIGH GLOSS FINISH

The high gloss finish gives your floor a shiny, polished look that enhances the beauty of the wood species you have chosen. It also protects your floor from everyday wear and tear.



#### **BRUSHED**

Brushing the surface highlights the natural structure of the grain and creates additional texture. Brushing is usually accompanied by other surface treatments such as a beveled edge or a colored



### STAINED AND SMOKED

Both staining and smoking are used in our production and design process to enhance the natural tone of the wood and to add color. Our floors come in a vast spectrum of shades, from the palest white and greys, to the darkest brown and inky blacks.



### **BEVELED EDGES**

Beveling the edges of a plank floorboard accentuates its shape. From a micro-bevel (a slight accentuation of the edge using sandpaper) to a more dramatic, stronger bevel on all edges, this design feature gives the floor a more distinct look.



#### **HANDSCRAPPED**

The rich character surface that provides a truly rustic feel is created by hand, using different wood scraping and sanding tools. It creates a wood floor with the look and feel of an old floor worn by time

### **GRADINGS**

Throughout 2017-2018 Kährs will be transitioning to a new concept of communicating timber gradings to better convey the nature of our products' visuals. The new grading concept will better reflect and accommodate our entire flooring range and focus on the appearance of the floor and how the planks interact with each other. These new classifications start with Calm and intensify to Expressive.



#### CALM (CITY)

These floors are produced from our cleanest boards; with a uniform appearance, small variations in grain and tone and may contain small knots.



#### VARIATION (TOWN)

The floors with this grading are characterized by subtle variations in color, tone and pattern and may contain small knots.



#### LIVELY (COUNTRY)

The Lively floors feature dramatic graining, gnarls, and knots. They boast greater color variations while having a lively rustic character.



#### DYNAMIC

These floors are made from planks with knots and cracks that give them a dramatic character with greater color variation.



#### **EXPRESSIVE**

Expressive floors showcase a strong presence with dramatic cracks, powerful knots, and a wide color variation.



#### SUPREME QUALITY AND CRAFTSMANSHIP

Using time-honored skills, Kährs combines unrivaled hand-made craftsmanship, outstanding design and the latest production and surface techniques to create a floor of distinction. Unique floors in Oak, Ash, and Beech come to life in an array of designs and finishes, all united by striking, exclusive looks and absolute attention to detail.

#### THE FOUNDATION OF QUALITY

The Kährs' Original range has grown into our largest and most popular line of wood floors. Available in a wide variety of wood species and finishes – and inspired by our Scandinavian roots – every floor is a true classic.

#### **OUR INTRODUCTORY RANGE**

With worldwide renowned quality and flexibility, Kährs Avanti presents our most popular wood species and gradings paired with popular colors and styles.

#### LONG-LASTING BEAUTY

Beauty isn't always fleeting – particularly when it comes to Kährs Spirit. Thanks to their durable finish and construction, floors from the Kährs Spirit range retain their beauty for years making them perfect for your home or commercial needs.

#### THE PERFECT FIT

Measuring just one quarter inch in thickness, the slender profile of Linnea offers a low-impact, real wood flooring option for any space. These beautiful wood veneer floors bring unrivaled style to the home, making it a modern, natural choice.

#### CONCEPTUAL DESIGN

Kährs ID is our brand new concept for developing the next generation of cutting edge wood floors. Based on our extensive experience of working with wood, and the traditional methods of wood floor manufacturing, we've explored and developed new pathways and possibilities.

#### THE FOUNDATION OF QUALITY

Kährs Activity Floor is a wood floor specially designed for sports. A result of long-term research, it combines excellent energy-absorbing qualities with durability and good looks. Kährs Activity Floor creates an optimal surface for all types of sports and the patented construction promotes fast, simple installation.

## Kährs **Supreme**

## Kährs **Original**

## Kährs **Avanti**

## Kährs **Spirit**

Kährs **Linnea** 

## Kährs ID


Kährs **Activity Floor** 


#### COLLECTION TABLE OF CONTENTS

Kährs <b>Supreme</b>	Grande Collection	Starts on page
	Shine Collection	9
	Småland Collection	17
	Da Capo Collection	131
Kährs <b>ID</b>	Chevron Collection	37
Kährs <b>Original</b>	European Renaissance Collection	43
	European Naturals Collection	49
	American Naturals Collection	55
	Scandinavian Naturals Collection	61
	World Collection	67
	Harmony Collection	73
	Classic Nouveau Collection	91
	Sand Collection	95
	Founders Collection	107
	Artisan Collection	119
	Prime Collection	97
Kährs <b>Avanti</b>	Tres Collection	135
	Canvas Collection	151
Kährs <b>Spirit</b>	Unity Collection	179
	Rugged Collection	189
Kährs <b>Linnea</b>	Living Collection	195
	Habitat Collection	211
Kährs <b>Activity Floor</b>	Activity Floor	219

13

## **BOARD REFERENCE GUIDE**

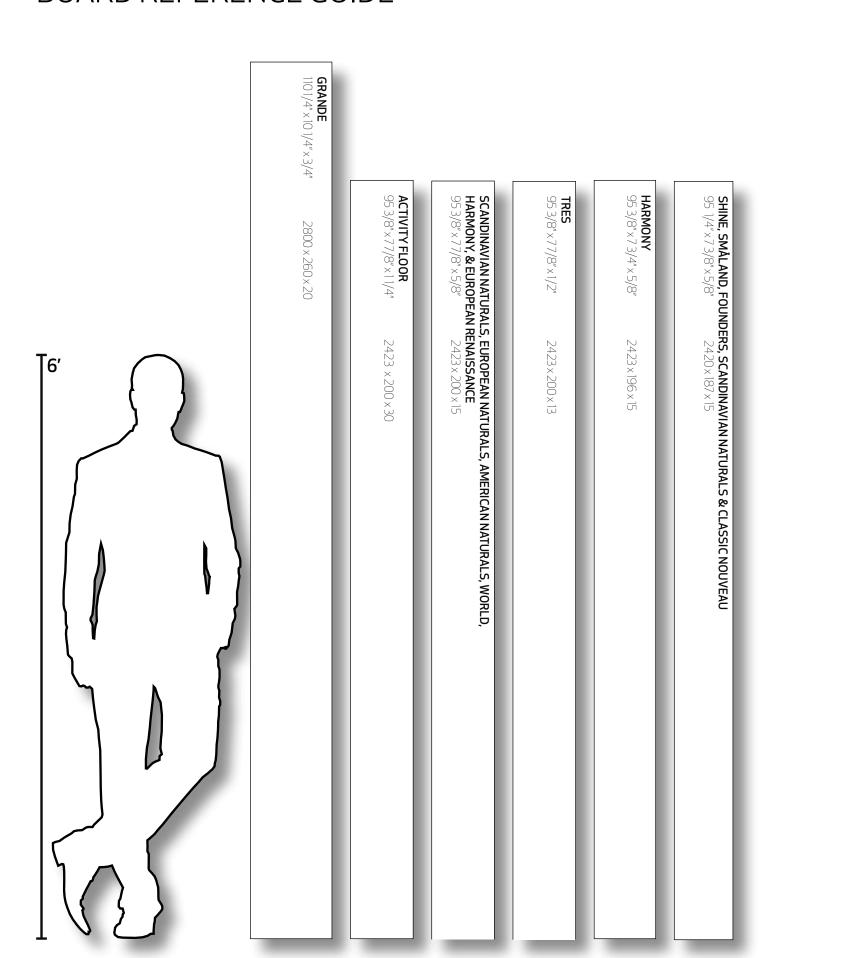

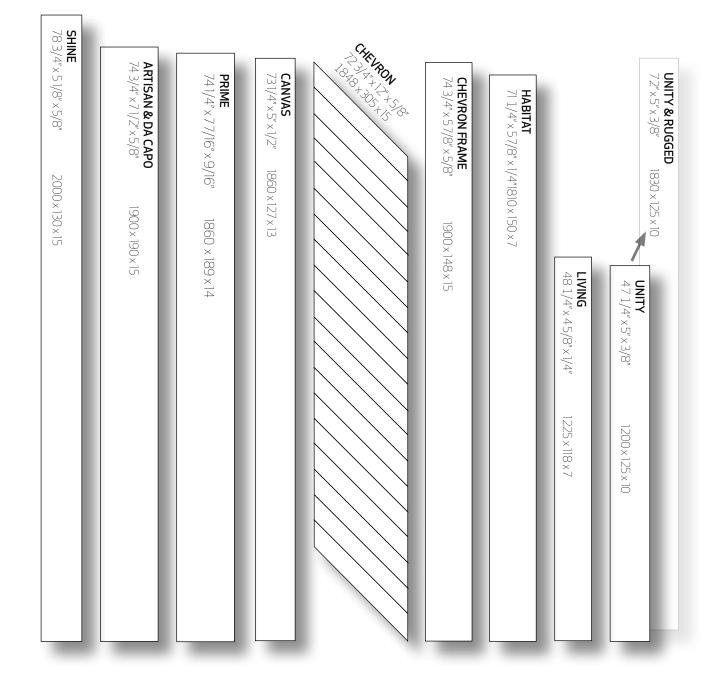


## PRODUCT COMPARISION CHART

SAMPLED PRODUCT	CLOSEST LINNEA PLANK	CLOSEST STRIP	CLOSEST SPIRIT PLANK	CLOSEST 4" STRIP	CLOSEST CANVAS PLANK
Taro	Taro	Alloy	Trench	Granite	Sacra
Truffle	Truffle	Vaila	Reef	Verona	Suede
Gate	Gate	Pima	Forest	Charcoal	Impasto/Curio
Statue	Statue/Cocoa	Supai	Forest	Charcoal	Impasto/Curio
Suede	Sugar/Tower	Lecco	Reef	Verona	Suede
Nuback	Sugar/Tower	Lecco	Reef	Verona	Nuback
Chalk	Shitake	Lecco	Trench	Granite	Chalk
Sacra	Taro	Granite	Tundra	Portofino	Sacra
Moire	Meringue	Ceriale	Arctic	Cirrus	Moire
Shade	Meringue	Ceriale	Trench	Portofino	Shade
Ceriale	Dome	Ceriale	Arctic	Cirrus	Moire
Supai	Coffee	Supai	Forest	Charcoal	Impasto/Curio
Vaila	Shitake	Vaila/Kalmar	Reef	Verona	Suede
Lecco	Sugar/Tower	Lecco	Reef	Verona	Suede
Pima	Statue/Cocoa	Pima	Garden	Charcoal	Impasto/Curio
Alabaster	Dome	Limestone	Arctic	Creme	Strobe
Cirrus	Dome	Limestone	Arctic	Cirrus	Moire
Lava	Coffee/Gate	Lava	Forest	Charcoal	Impasto/Curio
Alloy	Taro	Alloy	Trench	Granite	Sacra
Granite	Taro	Alloy	Trench	Granite	Sacra
Limestone	Dome	Limestone	Arctic	Cirrus	Strobe
Pale	Dome	Limestone	Arctic	Pale	Moire
Charcoal	Gate	Supai	Forest	Charcoal	Impasto/Curio
Portofino	Meringue	Ceriale	Arctic	Portofino	Moire

## **HOW TO USE THIS BINDER**

- 1. On the following pages you can view the Kährs product selections arranged by color.
- 2. To view more information about a product, turn to the page indicated to the right of the product name.
- 3. On the product page you will be able to see larger photos of the sample as well as interior photos (if available), profile construction, board reference, and shipping specifications.
- 4. To order a sample email <u>info@kahrs.com</u>



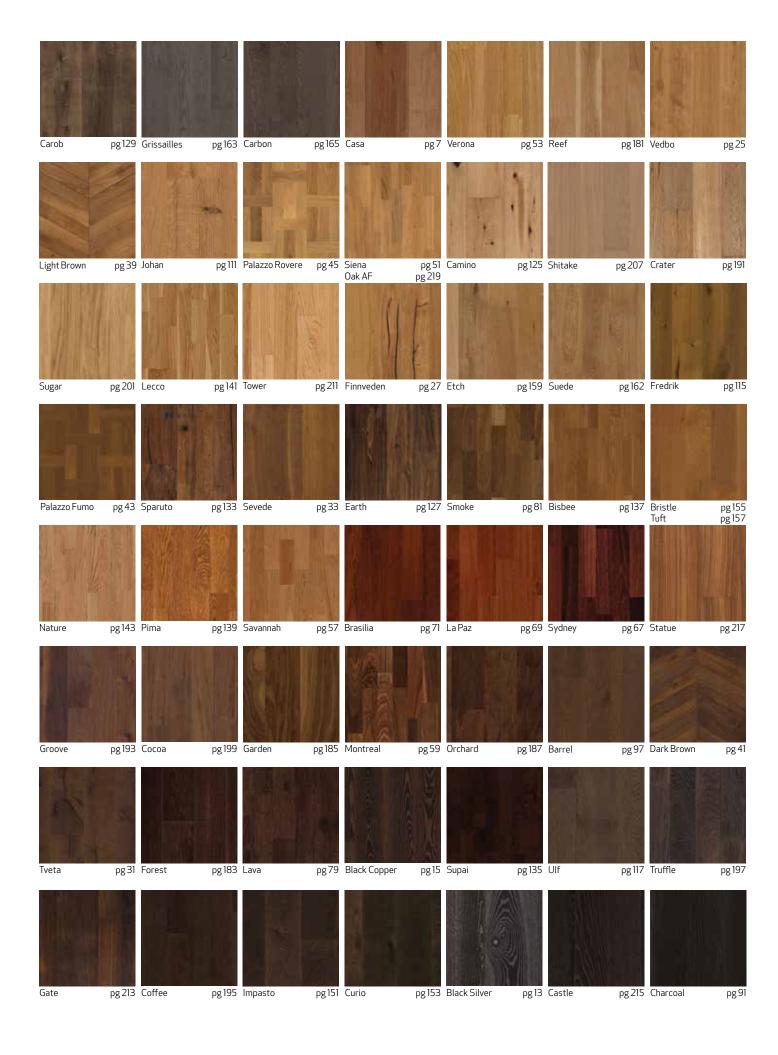



GRANDE COLLECTION

## GRANDE MANOR

Design: Plank

Features:


Rustic Oak, Huge Plank, Brushed, Handscraped, 4-sided Bevel

Surface Treatment:

Wear Layer: Approx. 6mm (1/4")

Traditional Tongue & Groove

Lifetime Structural Warranty: Glue-down, Nail-down Installation:




201XABEKFVKE280

 Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
110 1/4"	101/4"	3/4"	4	31.323ft <sup>2</sup>	74lbs	28	18





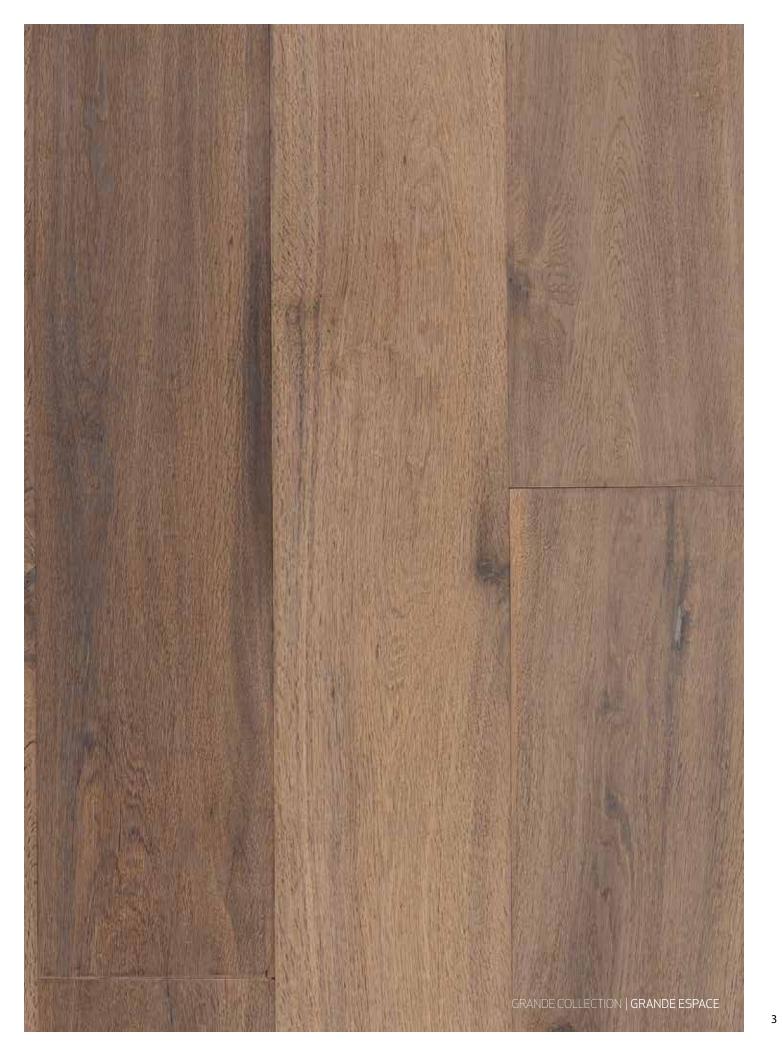

GRANDE COLLECTION

## GRANDE ESPACE

Design: Plank

Features:


Rustic Oak, Huge Plank, Brushed, Handscraped, 4-sided Bevel

Surface Treatment:

Wear Layer: Approx. 6mm (1/4")

Traditional Tongue & Groove

Lifetime Structural Warranty: Glue-down, Nail-down Installation:



Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
110 1/4"	101/4"	3/4"	4	31.323ft <sup>2</sup>	74lbs	28	18







## **GRANDE MAISON**

201XABEKFBKE280

Design: Plank

Rustic Oak, Huge Plank, Brushed, Handscraped, Smoked, 4-sided Features:


Bevel

Oil Surface Treatment:

> Wear Layer: Approx. 6mm (1/4")

> > Traditional Tongue & Groove

Lifetime Structural Warranty: Glue-down, Nail-down Installation:



Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
110 1/4"	101/4"	3/4"	4	31.323ft <sup>2</sup>	74lbs	28	18









## **GRANDE CASA**

201XCDEKF0KE280

Design: Plank


Rustic Oak, Huge Plank, Handscraped, 4-sided Bevel Features:

Surface Treatment:

Wear Layer: Approx. 6mm (1/4")

> Traditional Tongue & Groove Joint:

Lifetime Structural Warranty: Glue-down, Nail-down Installation:



Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
110 1/4"	10 1/4"	3/4"	4	31.323ft <sup>2</sup>	74lbs	28	18









SHINE COLLECTION

## OAK PEARL

Design: Plank

Oak, Extreme High Gloss, Brushed, Micro Beveled Features:

High Gloss - UV Cured Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

783/4"	5 1/8"	5/8"	6	16 79ft <sup>2</sup>	29lhs	63	74	
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.	





151N3AEKP8KW200



## BEECH OPAQUE

151N8MBKW8KW240

Design: Plank

Beech, Extreme High Gloss, Smooth, Micro Beveled Features:

High Gloss - UV Cured Surface Treatment: Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Lifetime Structural 25 Year Wear Through Warranty:

Float, Glue-down, Nail-down Installation:

Weight Ctn/Pallet Pallets/Cont. Width Thickness Boards/Ctn Area Length 95 1/4" 73/8" 5/8" 6 29.278ft<sup>2</sup> 49lbs 50 16









ASH BLACK SILVER

151N8AAKS8KW240

Design: Plank

Ash, Extreme High Gloss, Smooth, Micro Beveled Features:

High Gloss - UV Cured Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Joint: Woodloc® 5S

Warranty:


Lifetime Structural 25 Year Wear Through

Float, Glue-down, Nail-down Installation:

95 1 /4"	73/8"	5/8"	6	29 278ft²	49lhs	50	16	
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.	





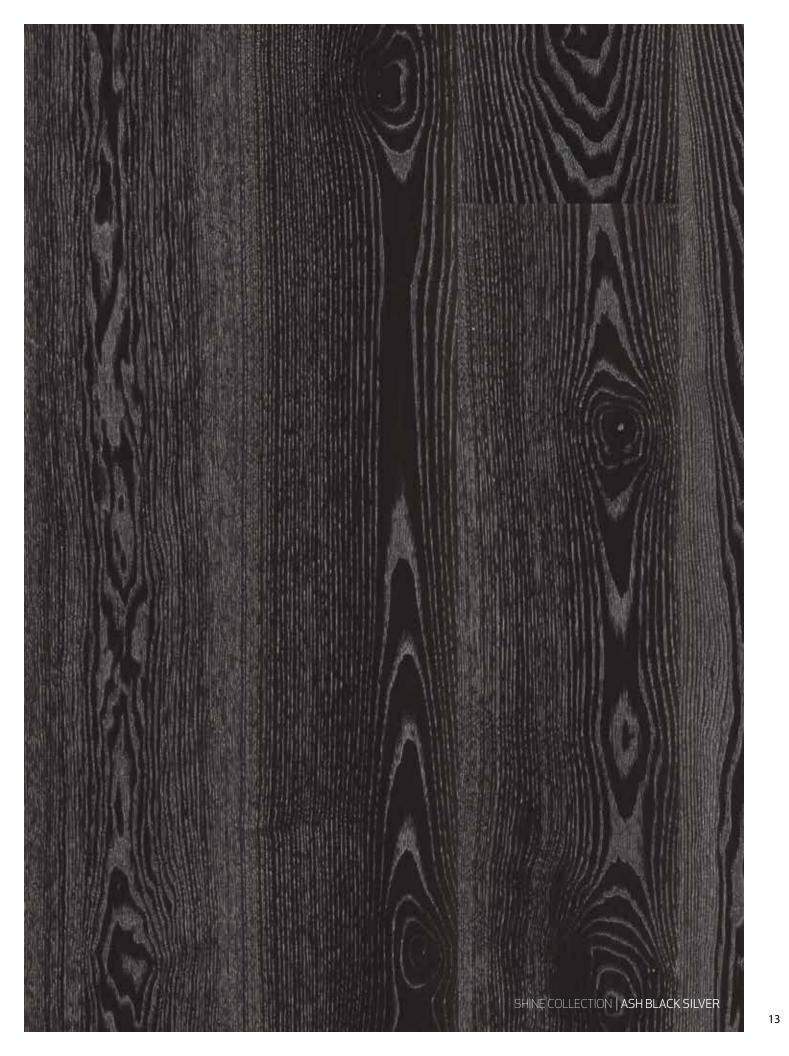



## ASH BLACK COPPER

151N8AAKC8KW240

Design: Plank

Ash, Extreme High Gloss, Smooth, Micro Beveled Features:

High Gloss - UV Cured Surface Treatment:

Warranty:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S


Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down

 		5/8"	<u> </u>	29.278ft <sup>2</sup>	49lbs	FO.	16	_
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	





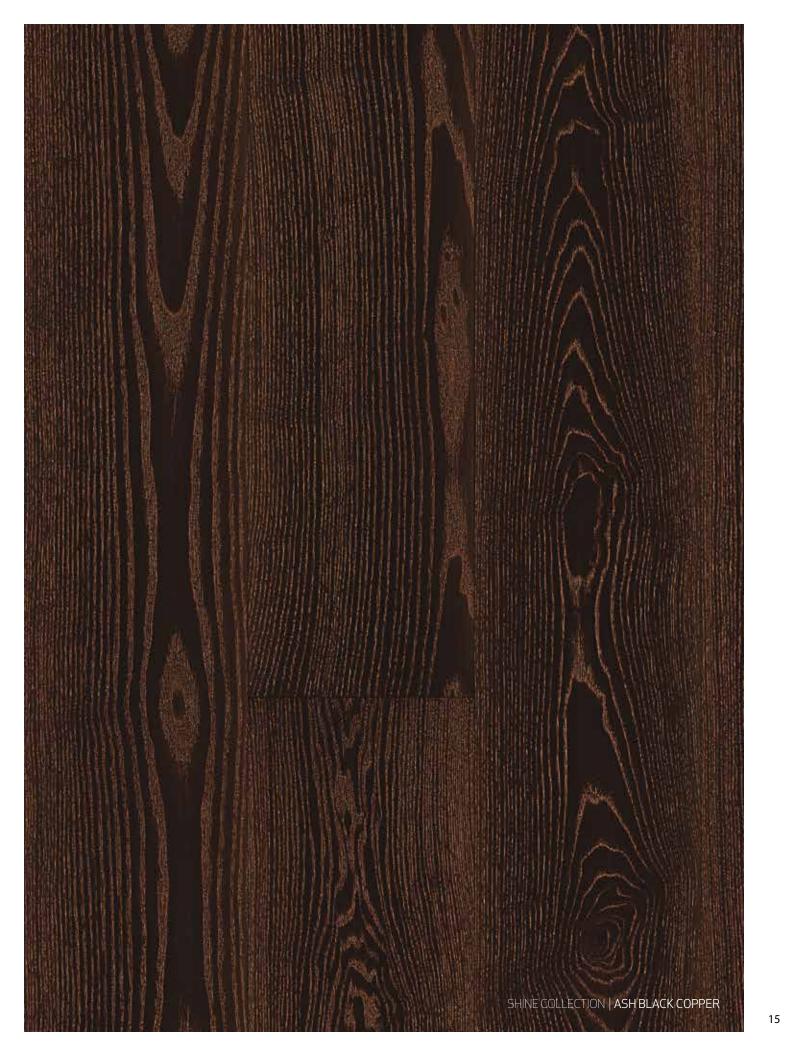







Features:


Rustic Oak, Brushed, Handscraped, Beveled

Surface Treatment:


Approx. 3.5mm (1/8") Wear Layer:

Joint: Woodloc® 5S Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation: Installation Over Radiant Heat Approved



Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/PalletPa	allets/Cont.
95 1/4"	7 3/8"	5/8"	6	29.278ft²	49lbs	50	16









## OAK ASPELAND

151NDSEK01KW240

Design: Plank

Rustic Oak, Brushed, Saw Marks, Handscraped, Beveled Features:


Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down

951/4"	73/8"	5/8"	6	29 278ft²	49lhs	50	16	
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/PalletP	Pallets/Cont.	
								1











151NCSEK03KW240

Design: Plank

Features:

Rustic Oak, Brushed, Handscraped, Beveled

Thickness

6

5/8"

Surface Treatment:

Warranty:

Length

95 1/4"

Approx. 3.5mm (1/8") Wear Layer:


> Woodloc® 5S Joint: Lifetime Structural

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

Width

73/8"



50

49lbs

16



29.278ft<sup>2</sup>







## OAK KINDA

151NDSEK02KW240

Design: Plank

Rustic Oak, Brushed, Saw Marks Handscraped, Beveled Features:

Thickness

5/8"

Surface Treatment:

Length

95 1/4"

Approx. 3.5mm (1/8") Wear Layer:


Woodloc® 5S Joint: Lifetime Structural Warranty:


Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

Width

73/8"











## OAK VEDBO

151NCSEK01KW240

Design: Plank

Features: Natural Rustic Oak, Brushed,

Handscraped, Beveled

Surface Treatment: Oi

Wear Layer: Approx. 3.5mm (1/8")

Joint: Woodloc® 5S
Warranty: Lifetime Structural

Installation: Float, Glue-down, Nail-down
Installation Over Radiant Heat Approved

95 1/4"	73/8"	5/8"	6	29.278ft²	49lbs	50	16
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/PalletPa	allets/Cont.
				ا د			









SMÅLAND COLLECTION

## OAK FINNVEDEN

151NDSEK03KW240

Design: Plank

Rustic Oak, Brushed, Saw Marks, Handscraped, Beveled Features:

Thickness

5/8"

Surface Treatment:

Length

95 1/4"

Approx. 3.5mm (1/8") Wear Layer:


Woodloc® 5S Joint: Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation:


Installation Over Radiant Heat Approved

Width

73/8"

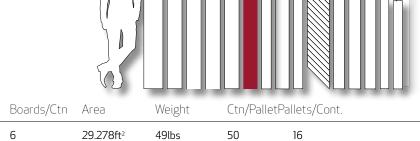



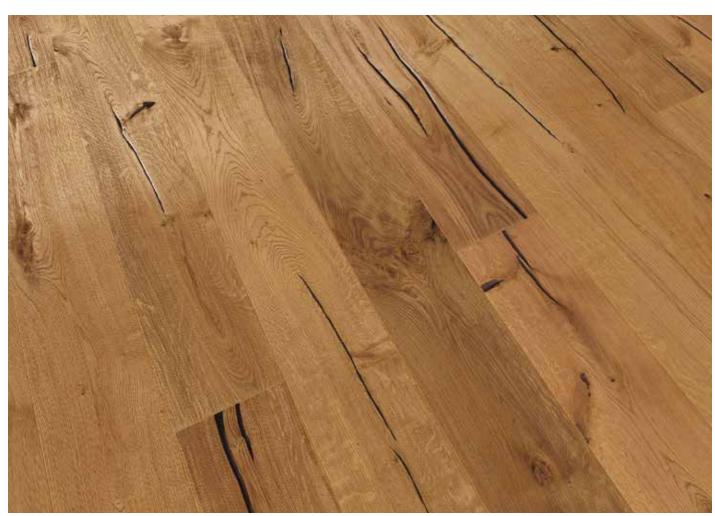



OAK YDRE

151NCSEK04KW240



Rustic Oak, Brushed, Handscraped, Lightly Smoked, Beveled Features:


Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:


Woodloc® 5S Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down

95 1/4"	73/8"	5/8"	6	29.278ft²	49lbs	50	16
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/PalletPa	allets/Cont.
							,





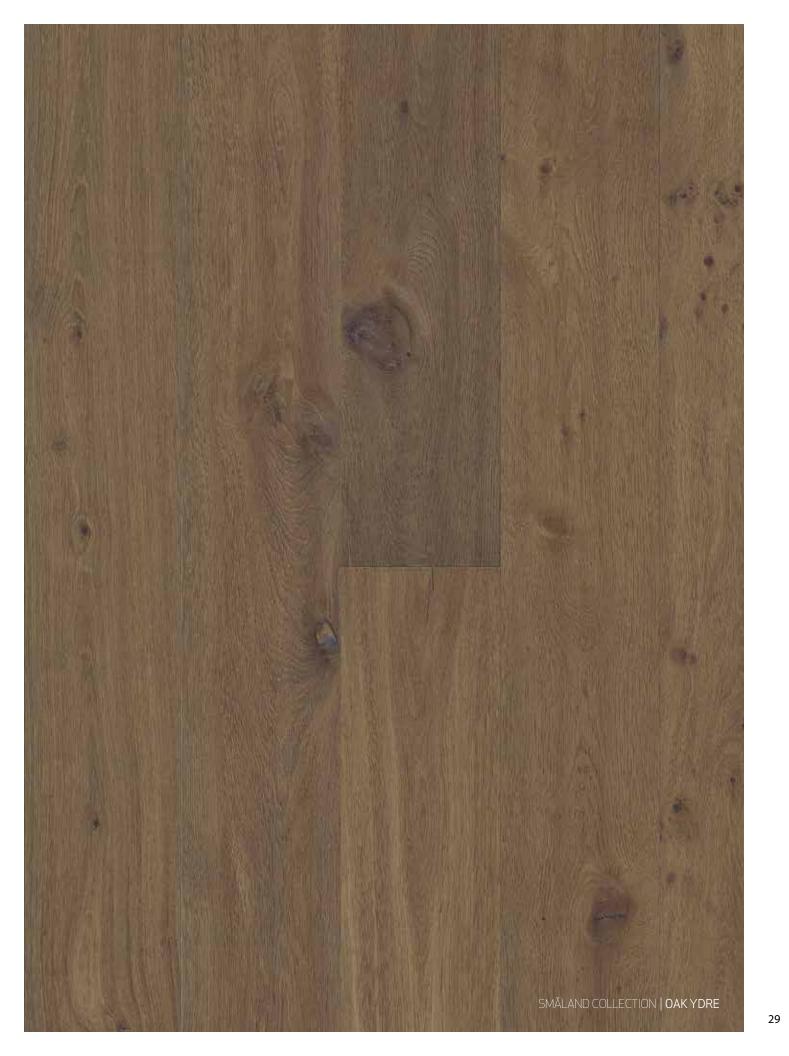



SMÅLAND COLLECTION

## OAK TVETA

151NDSEK04KW240

Design: Plank

Features:

Rustic Oak, Brushed, Handscraped, Lightly Smoked, Saw Marks, Beveled

Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down

Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pal	Ctn/PalletPallets/Cont.	
95 1/4"	73/8"	5/8"	6	29.278ft²	49lbs	50	16	
	STATE OF THE		THE STATE OF AS	STEEDERS N	阿里の中の田田			0.23



Surface layer consists of sawn strips.

Solid pine fingers.

Bottom layer of poplar veneer.





OAK SEVEDE

151NCSEK05KW240



Rustic Oak, Brushed, Handscraped, Lightly Smoked, Beveled Features:

Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S Joint: Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved









## OAK HANDBÖRD

151NDSEK06KW240



Features: Rustic Oak, Brushed, Lightly Smoked, Saw Marks, Beveled

Surface Treatment: 0

Wear Layer: Approx. 3.5mm (1/8")

Joint: Woodloc® 5S
Warranty: Lifetime Structural

Installation: Float, Glue-down, Nail-down

Length	Width	Thickness	Boards/Ctn		Weight		allets/Cont.
95 1/4"	73/8"	5/8"	6	29.278ft²	49lbs	50	16









## CHEVRON GREY

Design: Chevron

Features: Brushed Oak, 4-sided Micro Bevel


Surface Treatment: Oi

Wear Layer: Approx. 3.5mm (1/8")

Joint: Traditional Tongue & Groove

Warranty: Lifetime Structural

Installation: Glue-down



	Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
Lefts / Rights		12"	5/8"	4	21.958ft²	44lbs	30	18
Frame Board		5 7/8"	5/8"	8	24.219ft²	40lbs	48	20









## CHEVRON LIGHT BROWN

Design: Chevron

Brushed Oak, Lightly Smoked, 4-sided Micro Bevel Features:


Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Traditional Tongue & Groove

Lifetime Structural Warranty:

Installation: Glue-down



	Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
Lefts / Rights		12"	5/8"	4	21.958ft²	44lbs	30	18
Frame Board		5 7/8"	5/8"	8	24.219ft²	40lbs	48	20









## CHEVRON DARK BROWN

Design: Chevron

Features: Brushed Oak, Smoked, 4-sided

Micro Bevel


Surface Treatment: Oil

Wear Layer: Approx. 3.5mm (1/8")

Joint: Traditional Tongue & Groove

Warranty: Lifetime Structural

Installation: Glue-down



	Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
Lefts / Rights		12"	5/8"	4	21.958ft²	44lbs	30	18
Frame Board		5 7/8"	5/8"	8	24.219ft²	40lbs	48	20







15313REK15KW0



Lightly Smoked Oak, Smooth, Square Edge Features:

Matte (UV-Cured) Surface Treatment: Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

There is a sound of the sound o
idth Thickness Boards/Ctn Area Weight Ctn/Pallet Pallets/Cont.







153138EK50KW0



**Dutch Pattern** 

Smooth Oak, Square Edge Features: Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc® 5S

Warranty:

Lifetime Structural 25 Year Wear Through

Thickness

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

n						
	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	

	95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16	
	MODEL CONTRACTOR AND	The state of the s	The Party of the P						WORKSHO.
	Calling the Control of the Control o	530000000000000000000000000000000000000	TOOLSON SERVICE	Mary Market	MANAGE ACTION	以前な物は	ESENSA DIRAGISTA		CONTRACTOR OF THE PARTY OF THE
Carte Car							- 0		


Surface layer consists of sawn strips.

Length

Solid pine fingers.

Bottom layer of poplar veneer.



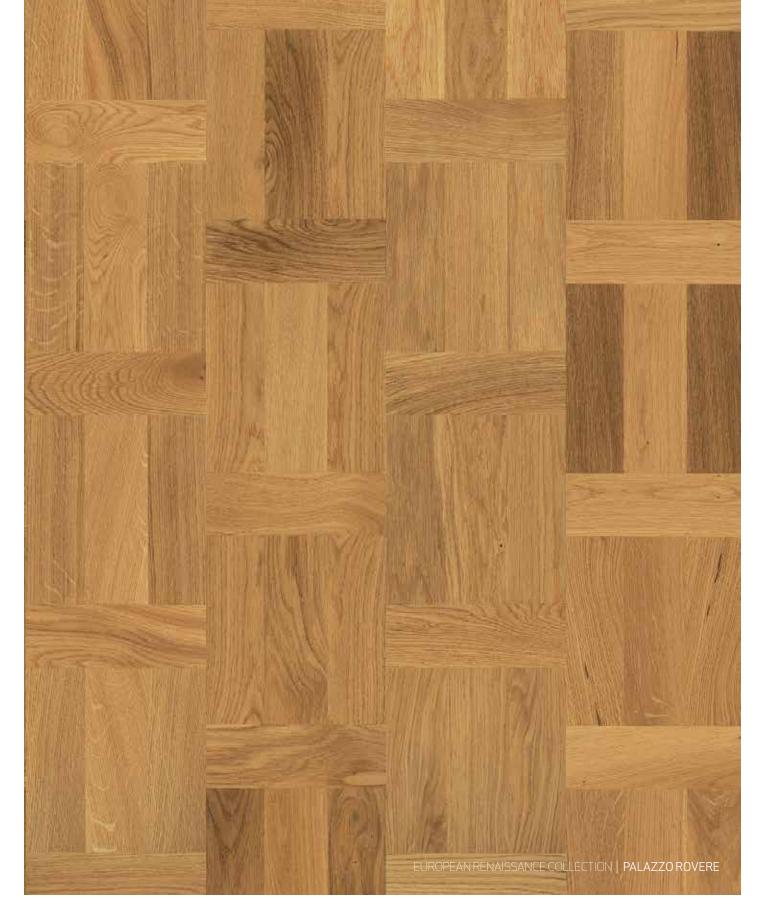

45



## PALAZZO BIANCO

Design: **Dutch Pattern** 

Brushed Oak, Square Edge Features: Matte Finish (UV-Cured) Surface Treatment:


> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc® 5S

Warranty:

Lifetime Structural 25 Year Wear Through


Installation: Float, Glue-down, Nail-down



Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16





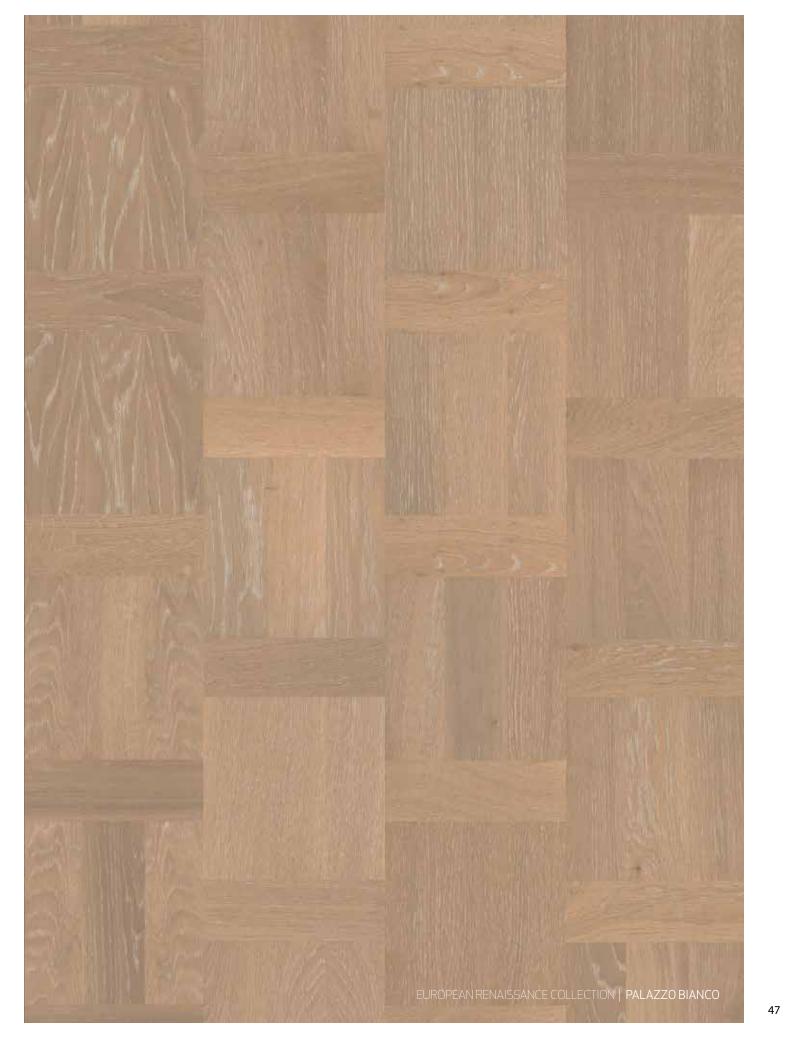



## EUROPEAN MAPLE SALZBURG

153N18EL50KW0

Design: Strip

Smooth European Maple, Square Edge Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Float, Glue-down, Nail-down

Installation:

95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16	_
Length	Width	Thickness	Boards/Ctn	Area			Pallets/Cont.	









## OAK SIENA

153N38EK50KW 0

Design:

Smooth White Oak, Square Edge Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc® 5S Joint:

Lifetime Structural Warranty:

25 Year Wear Through

Installation: Float, Glue-down, Nail-down Installation Over Padiant Heat Approved

Installation Over Radiant Heat Approved								
 Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16	
	Constitution of the Consti							









## OAK VERONA

152N38EK09KW0

Design:

Smooth White Oak, Square Edges Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:


Lifetime Structural Warranty:

25 Year Wear Through

Installation: Float, Glue-down, Nail-down

installation over Nadiant Heat Approved								
 Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16	



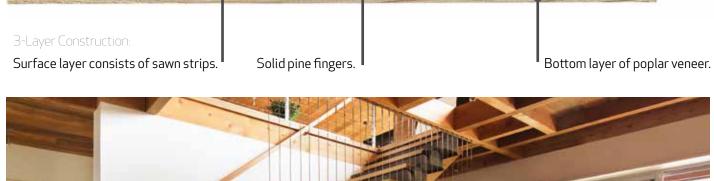





153N15AP50KW 0

Features: Smooth Canadian Maple, Square

Edge

Surface Treatment: Silk Matte Finish (UV-Cured)

Wear Layer: Approx. 3.5mm (1/8")

Joint: Woodloc® 5S

Warranty: Lifetime Structural 25 Year Wear Through

23 Teal Wear Through

Installation: Float, Glue-down, Nail-down

95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
				<b>V</b> \( \( \)			









## CHERRY SAVANNAH

153N15CH50KW 0

Design: Strip

Features: Smooth American Cherry, Square

Edge

Surface Treatment: Silk Matte Finish (UV-Cured)

Wear Layer: Approx. 3.5mm (1/8")

Joint: Woodloc® 5S

Warranty:

Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down

95 3/8"	77/8"	5/8"	б	31.323ft <sup>2</sup>	54lbs	50	16	
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	







153N15VA50KW 0



Features: Smooth American Walnut, Square

Edge

Surface Treatment: Silk Matte Finish (UV-Cured)

Wear Layer: Approx. 3.5mm (1/8")

Joint: Woodloc® 5S

Warranty: Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down

95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16	_
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.	









#### **ASH KALMAR**

153N18AK50KW0

Design:

Smooth Scandinavian Ash , Square Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved

95 3/8"	77/8"	5/8"	6	31 323ft²	54lbs	50	16	
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.	
				-				









## **ASH GOTLAND**

151L87AK50KW240

Design: Plank

Smooth Scandinavian Ash Features: Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc® 5S

Warranty:

Lifetime Structural 25 Year Wear Through

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

idinavian Ash nish (UV-Cured nm (1/8") nctural r Through own, Nail-down Approved	)					
	5	ΨΣ <i>)</i> [				
Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	

95 1/4"	7 3/8"	5/8"	6	29.278ft²	52lbs	50	16	
Steel Steel Steel				MAY 提供可靠自己的	S22233	SE ENERGY S		20,233

Surface layer consists of sawn strips.

Length

Solid pine fingers.

Bottom layer of poplar veneer.





SCANDINAVIAN NATURALS COLLECTION | ASH GOTLAND



#### **BEECH VIBORG**

153N18BK50KW0

Strip Design:

Features: Smooth Scandinavian Beech,

Square Edge

Silk Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Float, Glue-down, Nail-down Installation:

Width Ctn/Pallet Pallets/Cont. Thickness Boards/Ctn Area Weight Length 953/8" 77/8" 5/8" 31.323ft<sup>2</sup> 54lbs 50 16









WORLD COLLECTION **JARRAH SYDNEY** 

> Design: Strip

Smooth Australian Eucalyptus, Square Edge Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:


Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

Length	Width	Thickness ———	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
953/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16





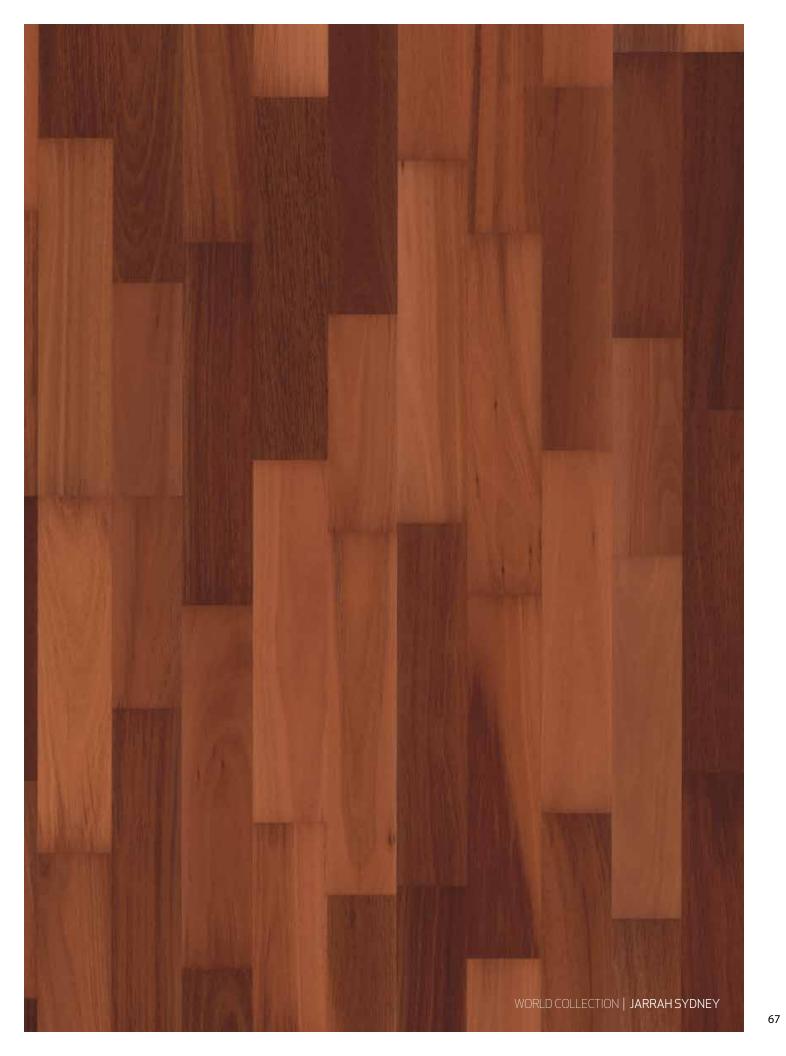

153N15JH50KW 0

# BRAZILIAN CHERRY LA PAZ (FSC)

153N16J050KW 0

Design: Strip

Smooth Brazilian Cherry, Square Edge, FSC Certified Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Warranty:

Lifetime Structural

25 Year Wear Through

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved

95 3/8"	77/8"	5/8"	6	31 323ft²	58lbs	50	16
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.
				-			







# BRAZILIAN CHERRY BRASILIA (FSC)

152N54J050KW0

Design: Strip

Smooth Brazilian Cherry, Square Edge, FSC Certified Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	60lbs	50	16	
Length	Width	Thickness	Boards/Ctn			Ctn/Pallet		









OAK CREME

152N7BEKOWKW 0

Design: Plank

Brushed European Oak, Square Edge, Lightly Smoked Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

953/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16	
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
								П









HARMONY COLLECTION OAK GRANITE

> Design: Plank

Brushed European Oak, Lightly Smoked, Square Edge Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved

95 3/8"	77/8"	5/8"	6	31 323ft²	54lbs	50	16
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.
				-			







152N6REKGGKW0



## OAK CIRRUS

Design: Plank

Brushed European Oak, Square Edge Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Float, Glue-down, Nail-down Installation: Installation Over Radiant Heat Approved

953/8"	77/8"	5/8"	6	31 3 2 3 ft <sup>2</sup>	54lhs	50	16	
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.	







152N2BEKVVKW0



OAK LAVA

153N6CEK1JKW0

Design: Strip

Brushed European Oak, Square Edge Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:


Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

953/8"	77/8"	5/8"	6	31 323ft²	54lbs	50	16
Length	Width	Thickness	Boards/Ctn			Ctn/Pallet	





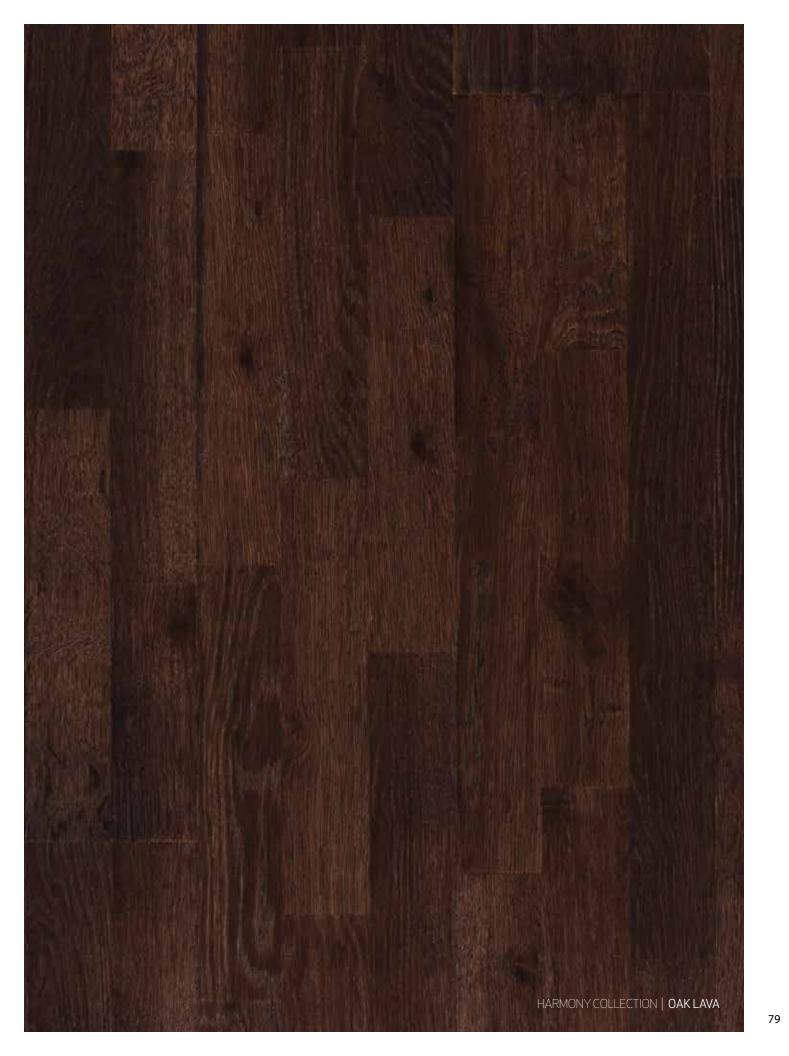



#### OAK SMOKE

153N3REK09KW0

Design: Strip

European Oak, Smoked, Square Edge Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

95 3/8"	77/8"	5/8"	6	31.323ft²	54lbs	50	16	
Length	Width	Thickness	Boards/Ctn	Area		Ctn/Pallet	Pallets/Cont.	









#### OAK ALLOY

153NOBEKD1KW0

Design: Strip

Brushed European Oak, Square Edge Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

		5/8"	6	31.323ft <sup>2</sup>			16
Length	Width	Thickness	Boards/Ctn	Агеа	Weight	Ctn/Pallet	Pallets/Cont.







153N5BEKP1KW 0

Design: Strip

Brushed European Oak, Square Edge Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.









OAK LIMESTONE 153NOBEKOWKW O

Design: Strip

Brushed European Oak, Square Edge Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved

Length Width Thickness Boards/Ctn Area Weight Ctn/Pallet Pallets/Cont.	953/8"	77/8"	5/8"	6	31 323ft²	54lhs	50	16	
	Length	Width	Thickness	Boards/Ctn					







153N1AAKW1KW0

Design: Strip

Features: Powder White Scandinavian Ash,

Micro Bevel

Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved

95 3/8"	73/4"	5/8"	6	30.677ft <sup>2</sup>	52lbs	50	16	
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.	
				-				







89



## OAK CHARCOAL

152N7AEKAOKW O

Design: Plan

Features: Brushed European Oak, Beveled

Surface Treatment: Matte Finish (UV-Cured)

Wear Layer: Approx. 3.5mm (1/8")

Joint: Woodloc® 5S

Warranty: Lifetime Structural

25 Year Wear Through

Thickness

5/8"

Boar

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

Length 95 3/8"


Width

77/8"

			Ш		
ds/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	





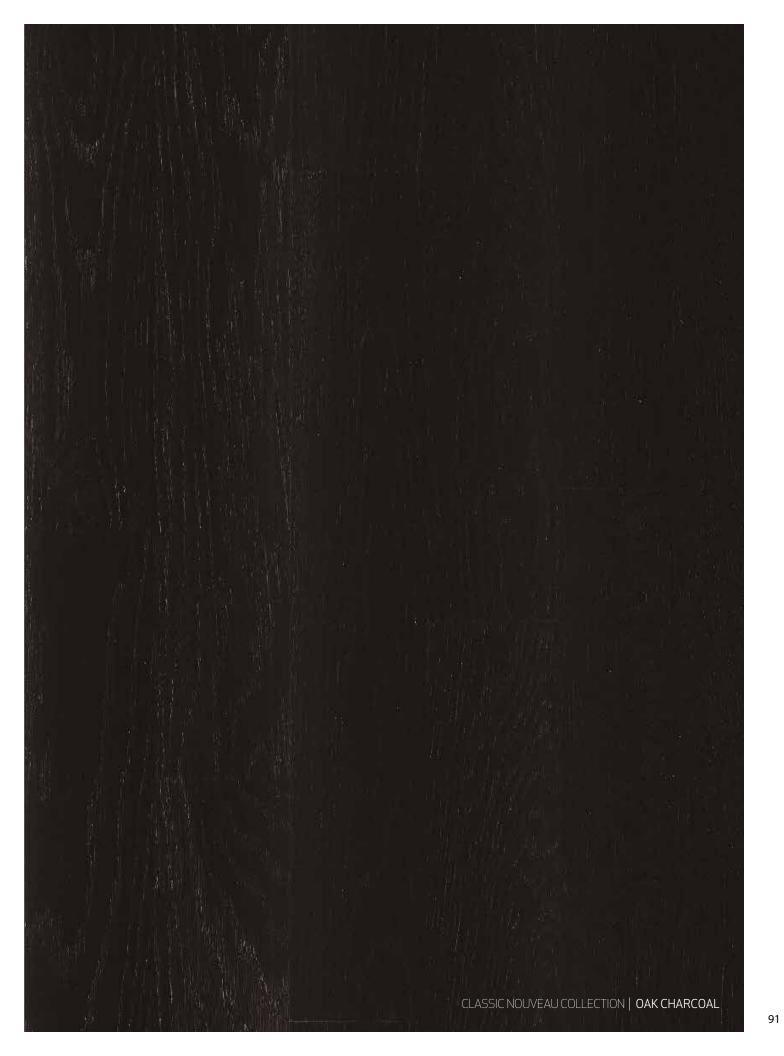



## OAK NOUVEAU GRAY

151NAYEKD1KW240

Design:

Brushed European Oak, Beveled Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc® 5S

Warranty:

Lifetime Structural 25 Year Wear Through

Thickness


5/8"

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

73/8"

Length 95 1/4"

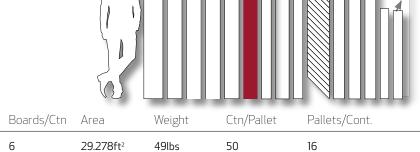

NAMES OF THE OWNER OWNE		/小学性自己自己的言意。 医多克	
3-Layer Construction:			
Surface layer consists of sawn strips.	Solid pine fingers.		Bottom layer of poplar veneer.







## OAK PORTOFINO

Design: Plank

European Oak, Square Edge Features:


Matte Finish (UV-Cured) Surface Treatment: Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S

Warranty:

Lifetime Structural 25 Year Wear Through

Float, Glue-down, Nail-down Installation:




Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
95 3/8"	77/8"	5/8"	6	31.323ft <sup>2</sup>	54lbs	50	16







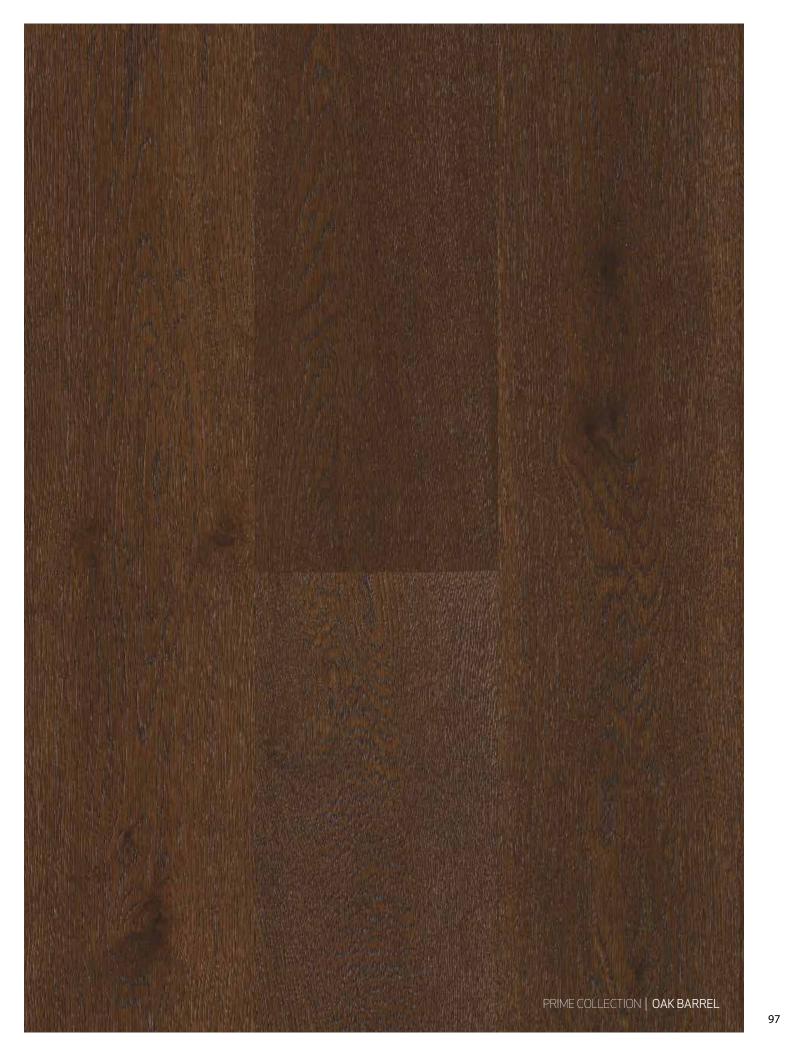

PRIME COLLECTION

#### OAK BARREL

141XACEK2BKW190



Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved Width Weight Ctn/Pallet Pallets/Cont. Thickness Boards/Ctn Area Length 77/16" 74 1/4" 9/16" 30.24ft<sup>2</sup> 45lbs 30 30





OAK BLANCHE

141XACEK2VKW190

Design: Plank

Features: Brushed Oak, Beveled Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc® Joint:

Warranty:


Lifetime Structural 25 Year Wear Through


Float, Glue-down, Nail-down Installation:

 Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
74 1/4"	7 7/16"	9/16"	10	30.24ft <sup>2</sup>	45lbs	30	30	
***		THE RESERVE THE PARTY OF THE PA	THE THE PARTY OF T	NAME OF STREET		NAME OF THE OWNER, WHEN	OR TOWNS OF STREET	ATTEN A






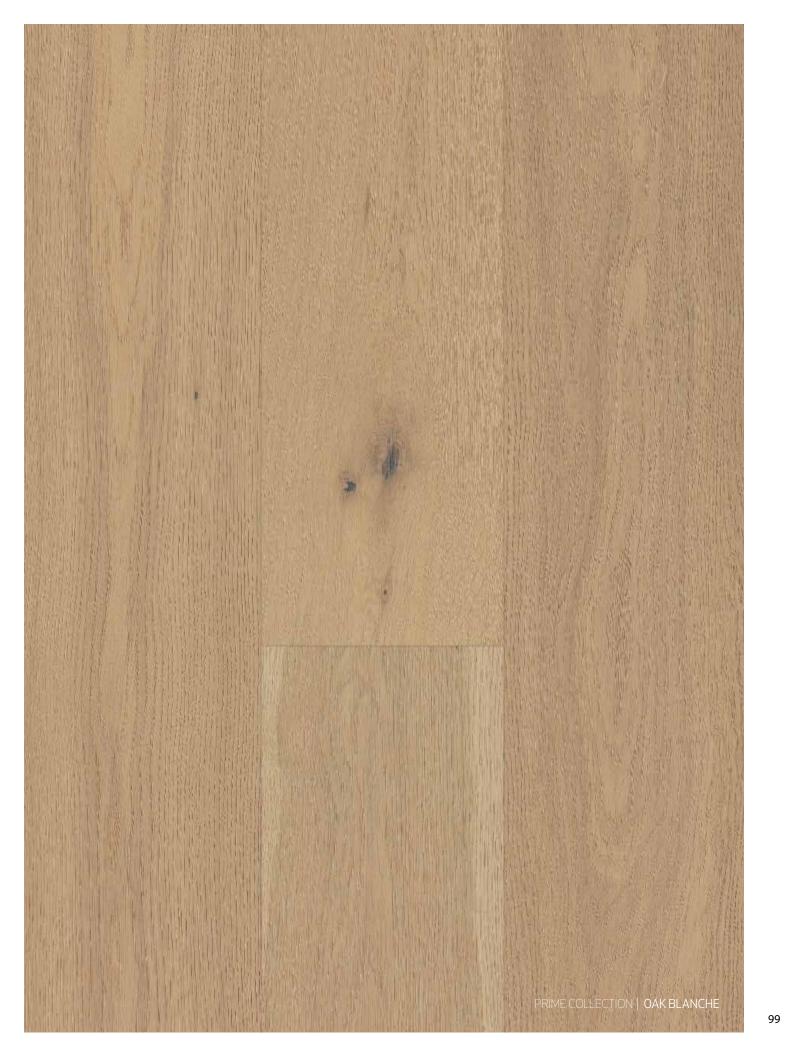

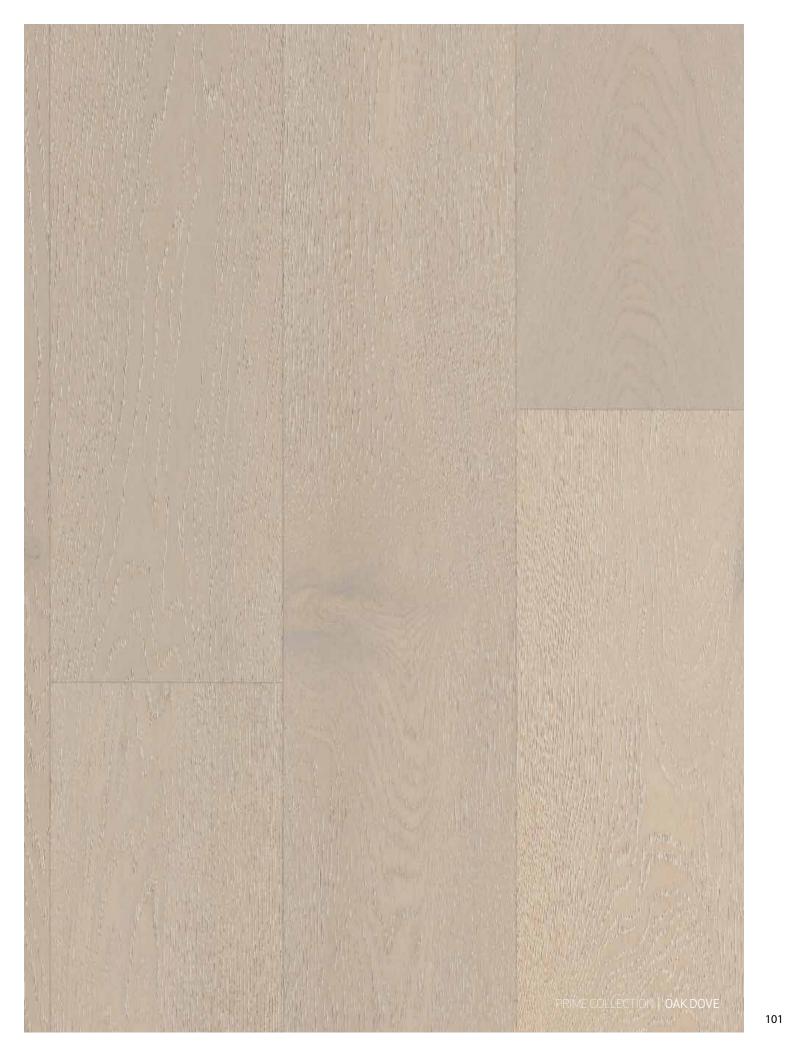


PRIME COLLECTION

## OAK DOVE

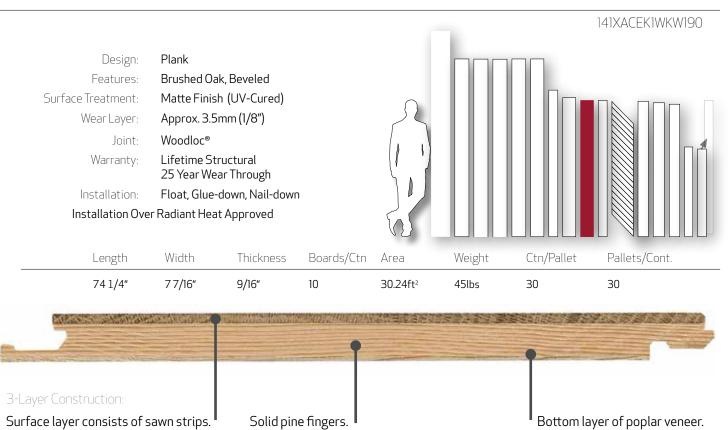



PRIME COLLECTION

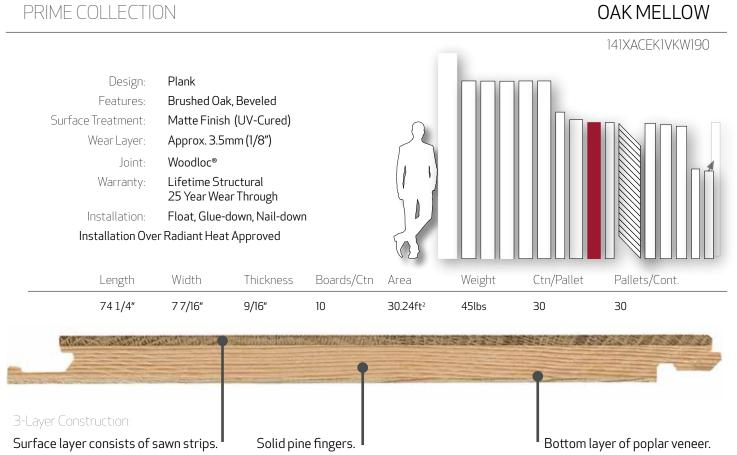



Length

## OAK MILLSTONE

30

Bottom layer of poplar veneer.

141XACEK2GKW190

Design: Plank

Brushed Oak, Beveled Features: Matte Finish (UV-Cured) Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Thickness

9/16"

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

Width

n						1
	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	



30.24ft<sup>2</sup>

Surface layer consists of sawn strips. Solid pine fingers.







OAK OLOF

Design: Plank

Features:

Rustic Scandinavian Oak, Beveled Edges, Brushed, Handscraped

Thickness

5/8"

Oiled Surface Treatment:

Length

95 1/4"


Approx. 3.5mm (1/8") Wear Layer:

Joint: Woodloc® 5S Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

73/8"

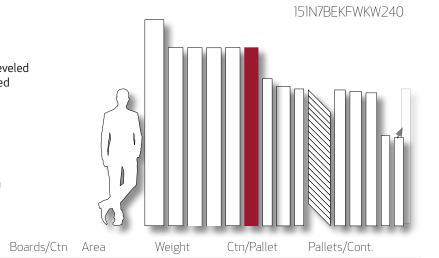

50

16

		(A)
BOLDE WHAVET		
3-Layer Construction:		
Surface layer consists of sawn strips.	Solid pine fingers.	Bottom layer of poplar veneer.

29.278ft<sup>2</sup>

49lbs





## OAK GUSTAF

16

151N7BEKFVKW240

Design: Plank

Features:

Rustic Scandinavian Oak, Beveled Edges, Brushed, Handscraped

Thickness

5/8"

Oiled Surface Treatment:

Length

95 1/4"


Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

73/8"

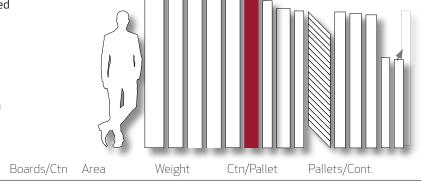

50

Alexander and the second of the		
3-Layer Construction: Surface layer consists of sawn strips.	Solid pine fingers.	Bottom layer of poplar veneer.

29.278ft<sup>2</sup>

49lbs





#### OAK JOHAN

151N7BEKF0KW240

Design: Plank

Features:

Rustic Scandinavian Oak, Beveled Edges, Handscraped, Brushed

Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Joint: Woodloc® 5S Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation:

Διοσ	Weight	Ctn/Pallet	Pallets/Cont

Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
95 1/4"	7 3/8"	5/8"	6	29.278ft <sup>2</sup>	49lbs	50	16







#### OAK STURE

151N7BEKFMKW240

Design: Plank

Rustic Scandinavian Oak, Beveled Edges, Handscraped, Brushed, Lightly Smoked Features:

Surface Treatment: Oiled

> Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S Joint: Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation:

95 1 /4"	73/8"	5/8"	6	29 278ft²	49lbs	50	16	
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.	







## OAK FREDRIK

151N7BEKFCKW240 Design: Plank Features: Rustic Scandinavian Oak, Beveled Edges, Handscraped, Brushed, Smoked Surface Treatment: Oiled Approx. 3.5mm (1/8") Wear Layer: Woodloc® 5S Joint: Lifetime Structural Warranty: Float, Glue-down, Nail-down Installation: Installation Over Radiant Heat Approved Width Ctn/Pallet Pallets/Cont. Thickness Boards/Ctn Area Weight Length 95 1/4" 73/8" 5/8" 49lbs 50 16 29.278ft<sup>2</sup>







OAK ULF

151N7BEKFBKW240

Design: Plank

Features:

Rustic Scandinavian Oak, Beveled Edges, Handscraped, Brushed

Surface Treatment:

Approx. 3.5mm (1/8") Wear Layer:

Woodloc® 5S Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved	

				( !)				Ш
 Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
95 1/4"	7 3/8"	5/8"	6	29.278ft²	49lbs	50	16	







OAK OYSTER



Features:

Rustic Oak, Beveled Edges, Brushed, Handscraped

Oiled Surface Treatment:

Length


Approx. 3.5mm (1/8") Wear Layer:

> Joint: Woodloc®

Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

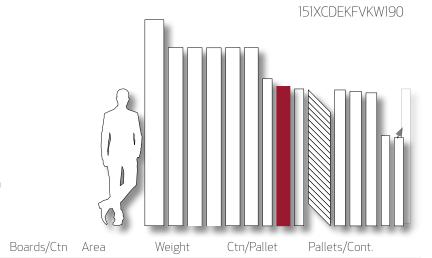

	743/4"	71/2"	5/8"	6	23.358ft <sup>2</sup>	39lbs	35	28	
7411 (2010)								×	
	The second second	The state of the s			MAY漢於田澤油產資	以前である。	e e e e e e e e e e e e e e e e e e e		20023
A					•				
NAME OF TAXABLE PARTY.	THE SHARE		STATE OF THE PARTY.	AND DESCRIPTION OF THE PARTY OF		-		1774	
			l						

Surface layer consists of sawn strips.

Solid pine fingers.

Thickness

Bottom layer of poplar veneer.







ARTISAN COLLECTION OAK LINEN 151XCDEKFVKW190

> Design: Plank

Rustic White Oak, Beveled Edges, Brushed, Handscraped, Lightly Smoked Features:

Surface Treatment: Oiled

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc® Joint:

Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved

743/4"	71/2"	5/8"	6	23.358ft <sup>2</sup>	39lbs	35	28
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
							,









OAK CONCRETE 151XCDEKFMKW190

Design: Plank

Rustic White Oak, Beveled Edges, Brushed, Handscraped Features:

Oiled Surface Treatment:

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc®


Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation:

	Installation (								
_	Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
	743/4"	71/2"	5/8"	6	23.358ft <sup>2</sup>	39lbs	35	28	





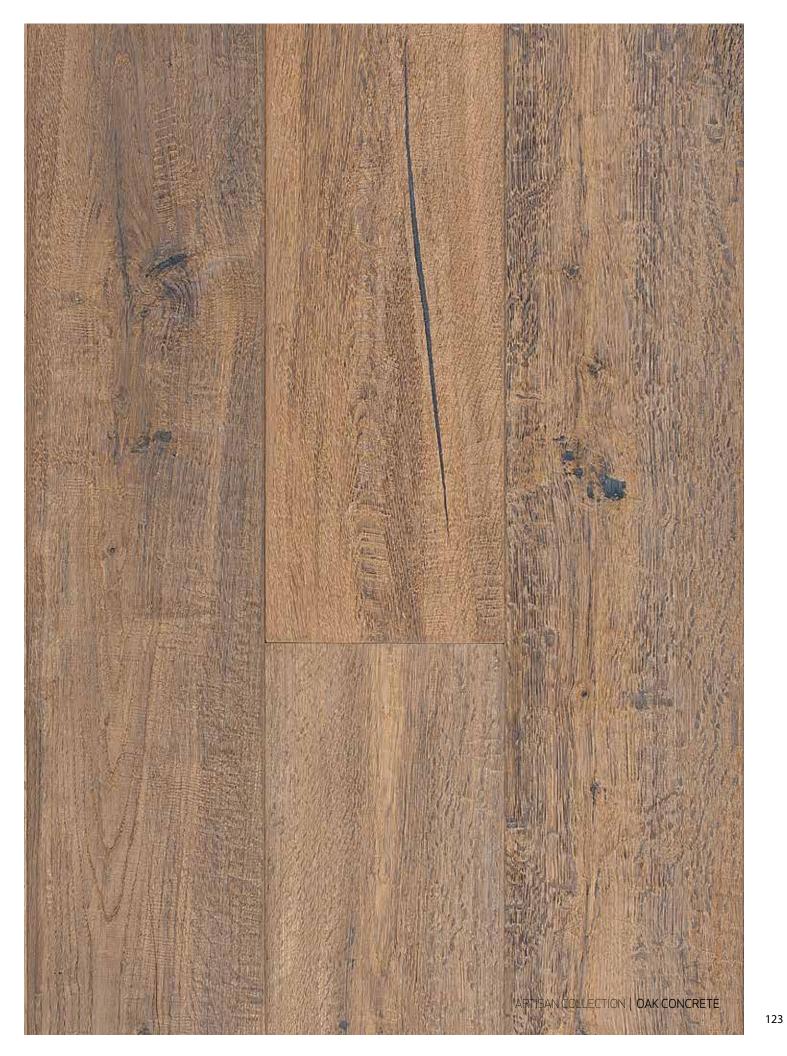



ARTISAN COLLECTION

OAK CAMINO

Design: Plank

Rustic White Oak, Beveled Edges, Handscraped Features:

Oiled Surface Treatment:

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc®

Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved						Ш		
	Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
	743/4"	71/2"	5/8"	6	23.358ft²	39lbs	35	28






125

ARTISAN COLLECTION | OAK CAMINO

151XDDEKFZKW190

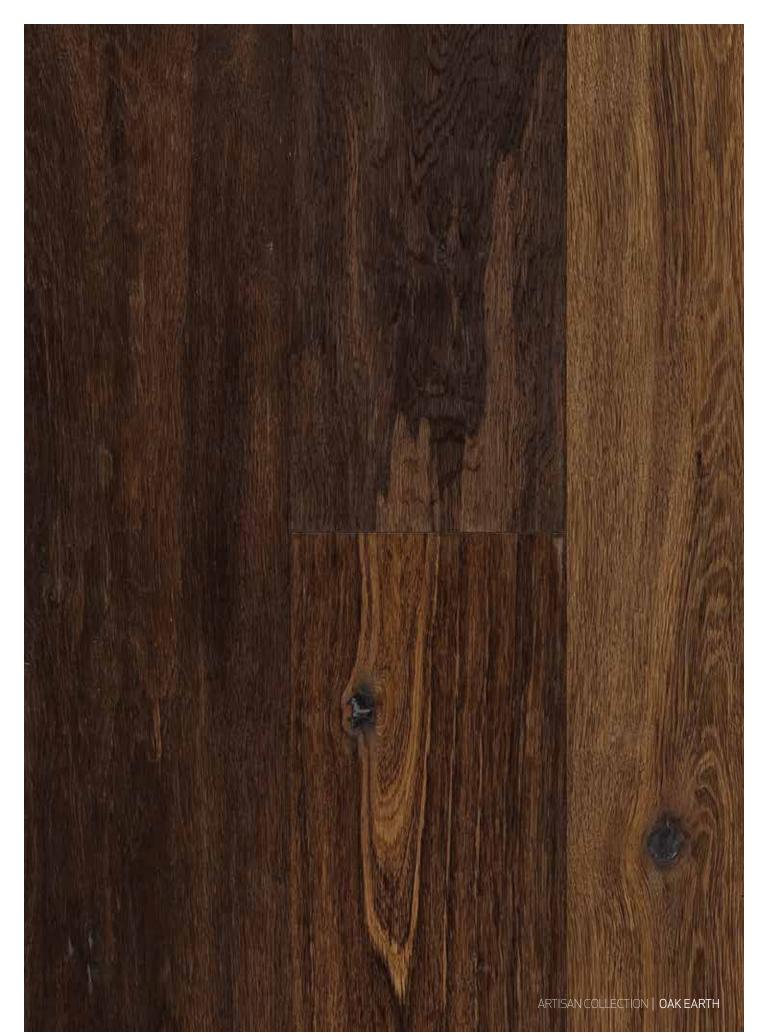

ARTISAN COLLECTION

### OAK EARTH

151XCDEKFCKW190

Design: Plank

Features: Rustic Wh

Rustic White Oak, Beveled Edges, Brushed, Handscraped, Smoked

Thickness

Surface Treatment: Oiled

Length

Wear Layer: Approx. 3.5mm (1/8")

Joint: Woodloc®

Warranty: Lifetime Structural

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

Width

n			Ш	Ш		
	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	

743/4" 71/2" 5/8" 6 23.358ft² 39lbs 35 28

3-Layer Construction:

Surface layer consists of sawn strips.

Solid pine fingers.

Bottom layer of poplar veneer.





MAPLE CAROB ARTISAN COLLECTION

> Design: Plank

Rustic Maple, Beveled Edges, Brushed, Smoked Features:


Oiled Surface Treatment:

> Approx. 3.5mm (1/8") Wear Layer:

> > Woodloc®

Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down

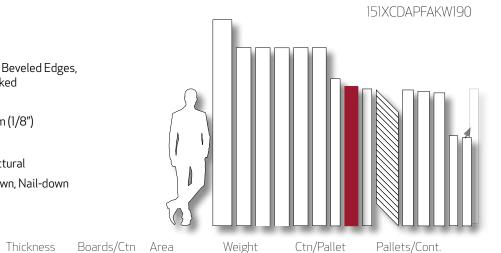

	Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
	743/4"	71/2"	5/8"	6	23.358ft²	39lbs	35	28	
E082		AND THE REAL PROPERTY.		PROBLEM N	以中国政治医院	经验的	\$55 BES #5	7507 NEW TYP	

Surface layer consists of sawn strips.

Solid pine fingers.

Bottom layer of poplar veneer.





## OAK INDOSSATI

151XDDEKFHKW190

Design:

Very Rustic Oak, 2-Sided Bevel, Brushed, Handscraped, Lightly Smoked Features:

Surface Treatment: Oiled

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® Joint:

Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation: Installation Over Radiant Heat Approved

74 3/4"	71/2"	5/8"	6	23 358ft²	39lhs	35	28
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
				v C			10000









DA CAPO COLLECTION

## OAK SPARUTO

151XDDEKFRKW190

Design: Plank

Very Rustic Oak, 2-Sided Bevel, Brushed, Wood Pegs, Handscraped, Smoked Features:

Surface Treatment: Oiled

Approx. 3.5mm (1/8") Wear Layer:

> Woodloc® Joint:


Lifetime Structural Warranty:

Float, Glue-down, Nail-down Installation: Installation Over Radiant Heat Approved

743/4"	71/2"	5/8"	6	23.358ft²	39lbs	35	28
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
				-			





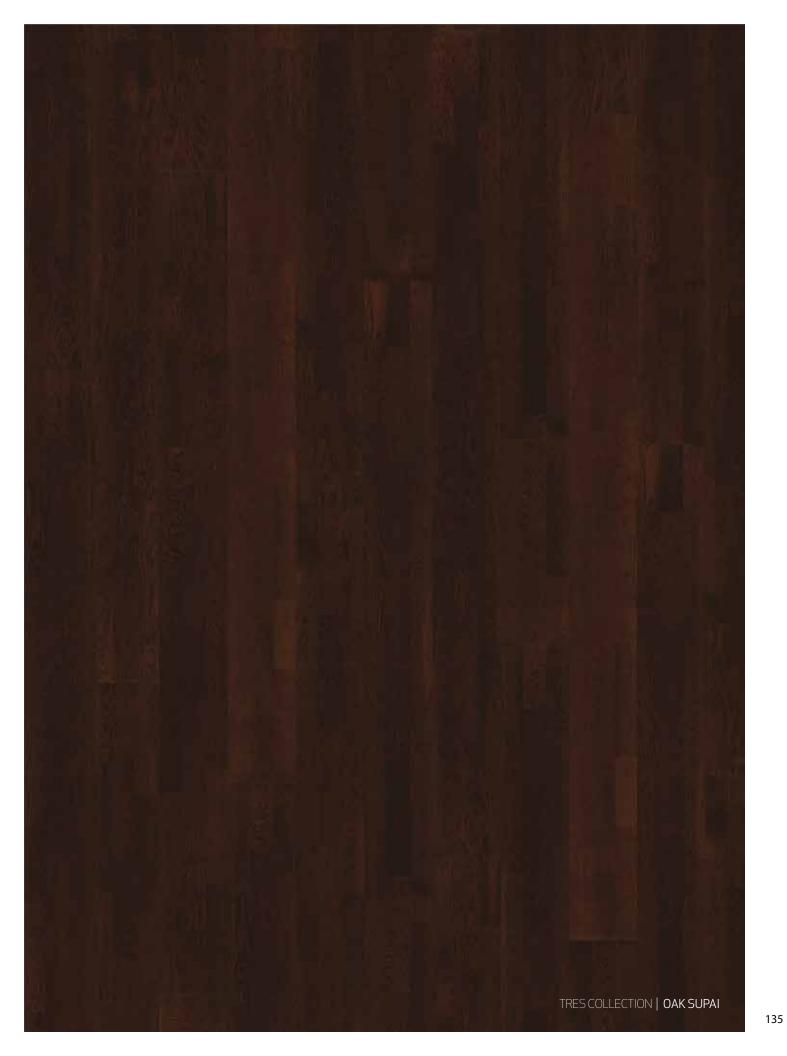

TRES COLLECTION

OAK SUPAI

133NABEK5LUW 0

Design: Strip

European Oak, Square Edge, Smooth Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 2.5mm Wear Layer:

> > Woodloc®5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

95 3/8"	77/8"	1/2"	7	36.598ft <sup>2</sup>	54lbs	50	16	
Length	Width	Thickness	Boards/Ctn				Pallets/Cont.	







OAK BISBEE

133NABEK5MUW 0

Design: Strip

European Oak, Square Edge, Smooth Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 2.5mm Wear Layer:

> > Woodloc®5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

				v C			, ,00000
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
95 3/8"	77/8"	1/2"	7	36.598ft <sup>2</sup>	54lbs	50	16







TRES COLLECTION OAK PIMA

> Design: Strip

European Oak, Square Edges, Smooth Features:

Gloss Finish (UV-Cured) Surface Treatment:

> Approx. 2.5mm Wear Layer:

> > Woodloc®5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved

95 3/8"	77/8"	1/2"	7	36.598ft <sup>2</sup>	54lbs	50	16
Length	Width	Thickness	Boards/Ctn	Area		Ctn/Pallet	







133NABEK7CUW 0



OAK LECCO TRES COLLECTION

Design:

European Oak, Square Edges, Smooth Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 2.5mm Wear Layer:

> > Woodloc®5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

95 3/8"	77/8"	1/2"	7	36.598ft <sup>2</sup>	54lbs	50	16	
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	







133NABEK50W 0



ECTION RED OAK NATURE

Design: Strip

Features: Red Oak, Square Edges, Smooth

Surface Treatment: Silk Matte Finish (UV-Cured)

Wear Layer: Approx. 2.5mm

Joint: Woodloc®5S
rranty: Lifetime Structural

Warranty: Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down

Thickness

Solid pine fingers.

1/2"


Installation Over Radiant Heat Approved

77/8"

Length

953/8"

Surface layer consists of sawn strips.

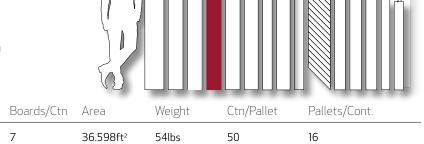

133NACER50CKW 0

Bottom layer of Spruce veneer.

A STATE OF THE PARTY OF THE PAR		和加州的人的高兴生工艺的	
	THE RESERVE OF THE PARTY OF THE		







**ASH CERIALE** TRES COLLECTION

> Design: Strip

Scandinavian Ash, Square Edges, Smooth Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 2.5mm Wear Layer:

> > Woodloc®5S Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

 95 3/8"	77/8"	1/2"	7	36.598ft <sup>2</sup>	54lbs	50	16	
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	







133NACAK1VKW 0



TRES COLLECTION

77/8"

1/2"

953/8"

133NACAK50W 0 Strip Design: Scandinavian Ash, Square Edges, Features: Silk Matte Finish (UV-Cured) Surface Treatment: Approx. 2.5mm Wear Layer: Woodloc®5S Joint: Lifetime Structural Warranty: 25 Year Wear Through Float, Glue-down, Nail-down Installation: Installation Over Radiant Heat Approved Width Boards/Ctn Area Ctn/Pallet Pallets/Cont. Thickness Weight Length



36.598ft<sup>2</sup>

54lbs

50

16



**ASH VAILA** 

133N18EL50KW 0

50

16

European Maple, Square Edges, Smooth Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 2.5mm Wear Layer:

953/8"

Woodloc®5S Joint:

77/8"

Lifetime Structural Warranty: 25 Year Wear Through

Float, Glue-down, Nail-down Installation:

1/2"

Width Weight Ctn/Pallet Pallets/Cont. Thickness Boards/Ctn Area Length

36.598ft<sup>2</sup>

54lbs

Surface layer consists of sawn strips. Solid pine fingers. Bottom layer of Spruce veneer.







## OAK IMPASTO

13106AEKDOKW180

Design: Plank

Oak, Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:


> > Woodloc® Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved					Ш			
 Length	Width	Thickness	Boards/Ctn	Агеа	Weight	Ctn/Pallet	Pallets/Cont.	
73 1/4"	5"	1/2"	8	20.343ft <sup>2</sup>	29lbs	42	30	







151

CANVAS COLLECTION | OAK IMPASTO



Length 73 1/4"

## OAK CURIO

13106AEKA1KW185

Design:

Oak, Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc®5G

Lifetime Structural Warranty:

25 Year Wear Through

Thickness

1/2"

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved


Width

ı			Ш			
	Boards/Ctn	Агеа	Weight	Ctn/Pallet	Pallets/Cont.	



17.760ft<sup>2</sup>



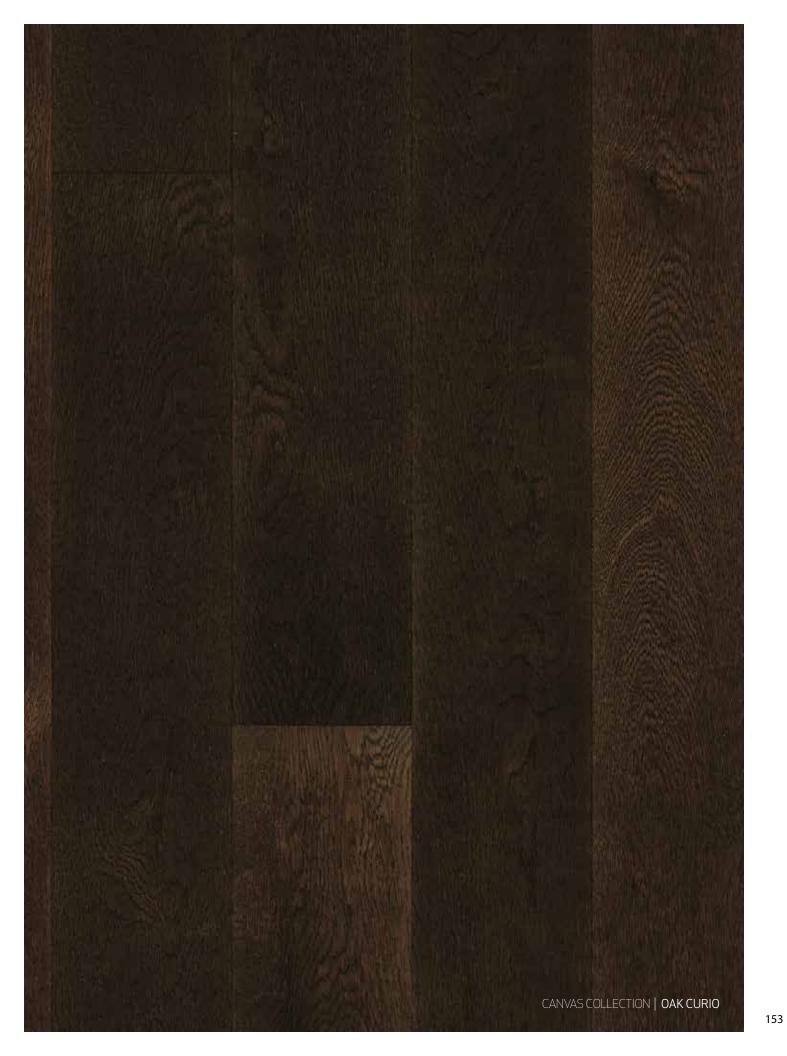



Length 73 1/4" OAK BRISTLE

13103AEK1BKW180

Design: Plank

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc® Joint:

Lifetime Structural Warranty:

25 Year Wear Through

Thickness

1/2"

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved







155

CANVAS COLLECTION | OAK BRISTLE



CANVAS COLLECTION

**OAK TUFT** 

Design: Plank

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:


> > Woodloc® 5G Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved



 Length	Width	Thickness	Boards/Ctn	Агеа	Weight	Ctn/Pallet	Pallets/Cont.	
73 1/4"	5"	1/2"	7	17.760ft²	28lbs	63	24	





OAK ETCH

13106AEK15KW185

Design:

Plank Features:

Rustic Oak, Micro Beveled Edges, Brushed

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc®5G Joint:

Lifetime Structural 25 Year Wear Through Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

-	73 1/4"	5"	1/2"	7	17.760ft²	28lbs	63	24
L	_ength	Width	Thickness	Boards/Ctn			Ctn/Pallet	Pallets/Cont.









# OAK SUEDE

Design: Plank

Oak, Micro Beveled Edges, Smooth Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc® Joint:


Warranty:

Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

				v C			10000
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
73 1/4"	5"	1/2"	8	20.343ft <sup>2</sup>	29lbs	42	30







13103AEK15KW180



## OAK GRISAILLES

13106AEK1RKW180

Design:

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved

73 1/4"	5"	1/2"	8	20.343ft <sup>2</sup>	29lbs	42	30
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
							,









CANVAS COLLECTION OAK CARBON

> Design: Plank

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc®5G Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Thickness

1/2"

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

Width

5"

Length 73 1/4"



13106AEK1RKW185





CANVAS COLLECTION

OAK SACRA

13103AEK1IKW180

Design: Plank

Features: Oak, Micro Beveled Edges, Brushed

Surface Treatment: Matte Finish (UV-Cured)

Wear Layer: Approx. 3mm

Joint: Woodloc®

Warranty: Lifetime Structural

25 Year Wear Through

Thickness

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

n		Ш			
Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	

73 1/4"	5"	1/2"	8	20.343ft²	29lbs	42	30
1000		Editor No. 200	a Military W	the construction of the same	· · · · · · · · · · · · · · · · · · ·	<b>国大学社会</b>	NO PORT
525		THE NAME OF THE PARTY OF THE PA	CALLAR COMPANIES WAS DEED	•	The state of the s		

-Layer Construction

Surface layer consists of sawn strips.

Length

Solid pine fingers.

Bottom layer of Spruce veneer.





CANVAS COLLECTION

Length 73 1/4"

### OAK SHADE

13106AEKWGKW180

Design:

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Thickness

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

Width

ו			Ш		
Boards/Ctr	n Area	Weight	Ctn/Pallet	Pallets/Cont.	



20.343ft<sup>2</sup>





#### OAK STROBE CANVAS COLLECTION

Design: Plank

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

73 1/4"	5"	1/2"	8	20.343ft <sup>2</sup>	29lbs	42	30
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.





171

13103AEK1WKW180



CANVAS COLLECTION

Length 73 1/4"

OAK CHALK

30

13103AEK1UKW180

Design: Plank

Features: Oak, Micro Beveled Edges, Brushed

Surface Treatment: Matte Finish (UV-Cured)

Wear Layer: Approx. 3mm

Joint: Woodloc®

Warranty: Lifetime Structural

25 Year Wear Through

Thickness

1/2"

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

n			Ш	Ш		
	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	

是国家的特别的原因。 2.								
ALC: NO.								
A CONTRACTOR OF THE PARTY OF TH	enter a maria de la companio		111 ( 111)					
3-Layer Construction:								
Surface layer consists of sawn strips.	Solid pine fingers.		Bottom layer of Spruce veneer.					

20.343ft<sup>2</sup>





## OAK MOIRE

13103AEK1VKW180

Design:

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

73 1/4"	5"	1/2"	8	20.343ft <sup>2</sup>	29lbs	42	30
Length	Width	Thickness	Boards/Ctn	Агеа	Weight	Ctn/Pallet	Pallets/Cont.
				<b>(1)</b>			









CANVAS COLLECTION OAK HUE

Design:

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 3mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 25 Year Wear Through

Thickness

1/2"

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved


Width

Length 73 1/4"

	8	20.343ft <sup>2</sup>	Weight 29lbs	42	30
	Boards/Ctn	Area	Woight	Ctn/Pallet	Pallets/Cont.
า					

13103AEK1MKW180



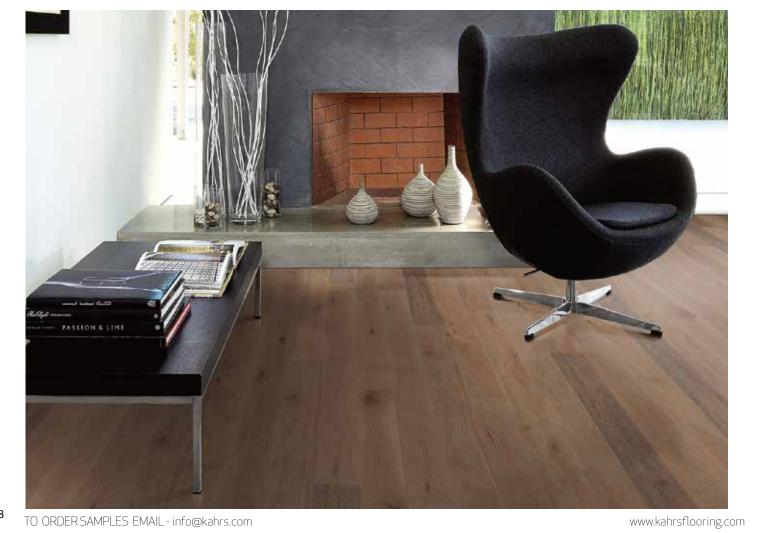



UNITY COLLECTION

Design: Plank

Oak, Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 1.90mm Wear Layer:


> > Woodloc® Joint:

Warranty:

Lifetime Structural 20 Year Wear Through

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved



ARCTIC OAK

101P6AEK0DKW120

Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
47 1/4"	5"	3/8"	10	16.146ft²	29lbs	63	20
** AS MATERIAL I	S DEPLETED IN TH	IE 47 1/4" LENGTH,	STOCK WILL BE R	EPLENISHED WITH	THE LONGER BOA	ARD FORMAT BELOV	√ ***
72"	5"	3/8"	10	19.699ft <sup>2</sup>	36lbs	49	23







Length

72"

REEF OAK UNITY COLLECTION

> Design: Plank

Oak, Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 1.90mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 20 Year Wear Through

Thickness

3/8"

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

Width

5"

n			Ш			
	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
						Τ

101P3AEK09KW180

23



19.699ft<sup>2</sup>

36lbs







FOREST OAK UNITY COLLECTION

> Design: Plank

Oak, Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 1.90mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 20 Year Wear Through

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved

72"	5"	3/8"	10	19.699ft²	36lbs	49	23
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.





101P6AEK0JKW180



**GARDEN WALNUT** 

Design: Plank

Walnut, Beveled Edges, Smooth Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 1.90mm Wear Layer:


> > Woodloc® Joint:

Warranty:

Lifetime Structural 20 Year Wear Through

Float, Glue-down, Nail-down Installation:

Installation Over Radiant Heat Approved



101P3FVA50KW120

Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
47 1/4"	5"	3/8"	10	16.146ft²	29lbs	63	20
** AS MATERIAL I	S DEPLETED IN TH	IE 47 1/4" LENGTH	, STOCK WILL BE R	EPLENISHED WITH	HTHE LONGER BO.	ARD FORMAT BELOV	V ***
72"	5"	3/8"	10	19.699ft <sup>2</sup>	36lbs	49	23









ORCHARD WALNUT

Design: Plank

Rustic Walnut, Micro Beveled Edges Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 1.90mm Wear Layer:

Joint:	Woodloc®			/					
Warranty:	Lifetime St 20 Year We							п	
Installation:	Float, Glue-	-down, Nail-dowr	1					ш	
nstallation Over	Radiant Hea	t Approved			Ш	ШШ		Ш	
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.		
		,	,			63 BOARD FORMAT BEL			
72"	5"	3/8"	10	19.699ft²	36lbs	49	23		

101P6FVA09KW120









OAK TRENCH RUGGED COLLECTION

> Design: Plank

Rustic Oak, Micro Beveled Edges, Handscraped, Brushed Features:

Oiled Surface Treatment:

> Approx. 1.90mm Wear Layer:

> > Joint: Woodloc®

Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down

Installation Over Radiant Heat Approved

72"	5"	3/8"	10	19 699ft²	361hs	49	23
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
				, _			, , , , , , , , , , , , , , ,





101PHEKFMKW180



OAK CRATER

Design: Plank

Rustic Oak, Beveled Edges, Handscraped Features:

Oiled Surface Treatment:

72"

Approx. 1.90mm Wear Layer:


> Woodloc® Joint:

Lifetime Structural Warranty:

Installation: Float, Glue-down, Nail-down

3/8"

Installation Over Radiant Heat Approved



49

23

101P8HEKFCKW180

	1	
3-Layer Construction:		
Surface layer consists of sawn strips.	Kährs Eco Core middle layer.	Bottom layer of Spruce veneer.

19.699ft<sup>2</sup>

36lbs








RUGGED COLLECTION Design: Plank Rustic Walnut, Micro Beveled Edges, Handscraped, Brushed Features: Surface Treatment: Oiled Approx. 1.90mm Wear Layer: Woodloc® Joint: Lifetime Structural Warranty: Installation: Float, Glue-down, Nail-down Installation Over Radiant Heat Approved









WALNUT GROOVE

101P8HVAF0KW180

37101AEK1JFW 0



Installation:

Plank Features:

FSC Oak, Micro Beveled Edges, Brushed

Matte Finish (UV-Cured) Surface Treatment:


> Approx. 0.6mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 15 Year Wear Through Float, Glue-down

Installation Over Radiant Heat Approved								
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	_
181/1"	15/Q"	1//#	12	18 720f+2	2/lbs	60	30	









# OAK TRUFFLE (FSC)

37101REKOUFW 0

Design: Plank

FSC Oak, Micro Beveled Edges, Brushed, Smoked Features:

Matte Finish (UV-Cured) Surface Treatment:


Approx. 0.6mm Wear Layer:

> Joint: Woodloc®

Warranty:

Lifetime Structural 15 Year Wear Through

Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
48 1/4"	45/8"	1/4"	12	18.729ft²	24lbs	60	30









WALNUT COCOA

30

37101FVA50KW 0

Design: Plank

Walnut, Micro Beveled Edges Features: Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 0.6mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 15 Year Wear Through

1/4"

Float, Glue-down Installation: Installation Over Radiant Heat Approved

45/8"


48 1/4"

Width Boards/Ctn Area Weight Ctn/Pallet Pallets/Cont. Thickness Length

18.729ft²

24lbs

60



12







OAK SUGAR (FSC)

37101FEK50FW 0

Design: Plank

FSC Oak, Micro Beveled Edges Features:

Silk Matte Finish (UV-Cured) Surface Treatment:

> Approx. 0.6mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 15 Year Wear Through

								1000
Le	ngth W	idth Th	hickness E	Boards/Ctn .	Area	Weight	Ctn/Pallet	Pallets/Cont.
48	1/4" 4	5/8" 1/	<b>'</b> 4" 1.	2	18.729ft²	24lbs	60	30









# OAK TARO (FSC)

37101FEK1GFW 0

Design: Plank

FSC Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 0.6mm Wear Layer:

> > Woodloc® Joint:


Installation: Float, Glue-down

Warranty:

Lifetime Structural 15 Year Wear Through

Installation Over Radiant Heat Approved

481/4"	45/8"	1/4"	12	18 7 29ft²	24lbs	60	30	
Length	Width	Thickness	Boards/Ctn	Area		Ctn/Pallet	Pallets/Cont.	







37101FEKOVFW 0



FSC Oak, Micro Beveled Edges Features:

Matte Finish (UV-Cured) Surface Treatment:


> Approx. 0.6mm Wear Layer:

> > Joint: Woodloc®

Warranty:

Lifetime Structural 15 Year Wear Through

181//"	1 5 /Q"	1/4#	12	19 720f+2	2.411	60	20	
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
				٧ ۵				









OAK SHITAKE (FSC)

37101FEK1BFW 0

Design: Plank

FSC Oak, Micro Beveled Edges, Brushed Features:


Matte Finish (UV-Cured) Surface Treatment:

> Approx. 0.6mm Wear Layer:

> > Joint: Woodloc®

Lifetime Structural 15 Year Wear Through Warranty:

48 1 /4"	4 5/8"	1/4"	12	18 729ft²	24lhs	60	30	
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
				,			, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	









HABITAT COLLECTION OAK DOME

Design: Plank

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 0.6mm Wear Layer:

> > Joint: Woodloc®


Warranty:

Lifetime Structural 15 Year Wear Through

Thickness

Installation: Float, Glue-down

Installation Over Radiant Heat Approved

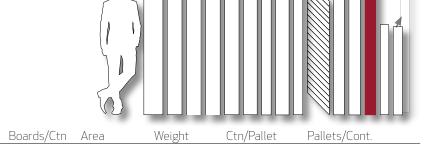


71 1/4"	5 7/8"	1/4"	12	35.091ft <sup>2</sup>	44lbs	50	16	

High-grade venveer surface layer.

Length

HDF middle layer.



37101AEKC1KW180





Length 71 1/4"

# **OAK TOWER**

37101AEK09KW180

Design: Plank

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 0.6mm Wear Layer:

> > Woodloc® Joint:

Warranty:

Lifetime Structural 15 Year Wear Through

Installation: Float, Glue-down

Width

5 7/8"

Installation Over Radiant Heat Approved

Thickness

Boards/Ctn	Агеа	Weight	Ctn/Pallet	Pallets/Cont.



35.091ft<sup>2</sup> 44lbs







OAK GATE

37101REK09KW180



Oak, Micro Beveled Edges, Brushed, Lightly Smoked Features:


Matte Finish (UV-Cured) Surface Treatment:

> Approx. 0.6mm Wear Layer:

> > Woodloc® Joint:

Lifetime Structural 15 Year Wear Through Warranty:

		•		,			, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
71 1/4"	5 7/8"	1/4"	12	35 N91ft²	44lhs	50	16









# OAK CASTLE

Design: Plank

Oak, Micro Beveled Edges, Brushed Features:

Matte Finish (UV-Cured) Surface Treatment:

> Approx. 0.6mm Wear Layer:


> > Woodloc® Joint:

Warranty:


Lifetime Structural 15 Year Wear Through

Float, Glue-down Installation:

Installation Over Radiant Heat Approved



Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
71 1/4"	5 7/8"	1/4"	12	35.091ft <sup>2</sup>	44lbs	50	16









Length 71 1/4" WALNUT STATUE

16

37101FVA09KW180

Design: Plank

Oak, Micro Beveled Edges Features:

Matte Finish (UV-Cured) Surface Treatment:

Approx. 0.6mm Wear Layer:

> Joint: Woodloc®

Warranty:

Lifetime Structural 15 Year Wear Through

1/4"

Installation: Float, Glue-down Installation Over Radiant Heat Approved


Width

5 7/8"



50

44lbs



35.091ft<sup>2</sup>







# OAK ACTIVITY FLOOR (FSC)

303N19EK50KW0


Design: Strip

Oak, Square Edges, Reinforcement and Energy Absorption Features:


Silk Matte Finish (UV-Cured) Surface Treatment:

> 3.5mm (1/8") Wear Layer:

> Woodloc® 5S Joint: 5 Years Warranty: Installation: Float



Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
95 3/8"	77/8"	11/4"	4	20.882ft <sup>2</sup>	48lbs	48	16

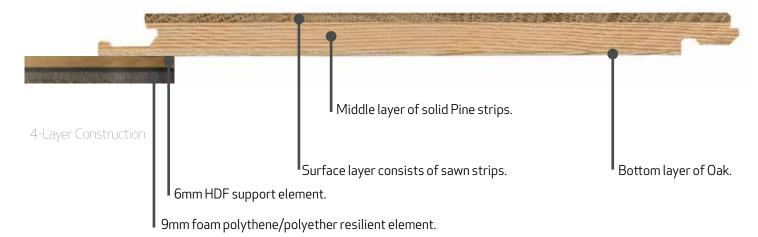

219



# ACTIVITY FLOOR COLLECTION

# MAPLE ACTIVITY FLOOR (FSC)

303N15AP50KW0


Design:

Oak, Square Edges, Reinforcement and Energy Absorption Features:


Silk Matte Finish (UV-Cured) Surface Treatment:

> 3.5mm (1/8") Wear Layer:

> Woodloc® 5S 5 Years Warranty: Installation: Float



Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.	
95 3/8"	7 7/8"	11/4"	4	20.882ft <sup>2</sup>	48lbs	48	16	

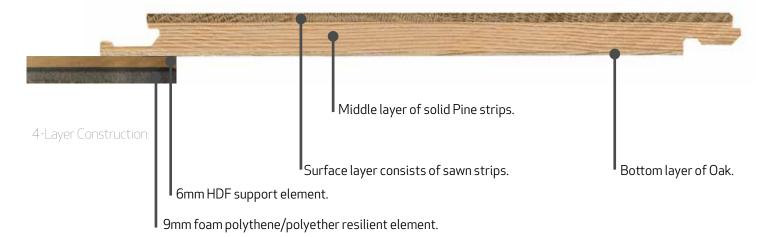



# ACTIVITY FLOOR COLLECTION

# BEECH ACTIVITY FLOOR (FSC)

Design: Strip

Oak, Square Edges, Reinforcement and Energy Absorption Features:


Silk Matte Finish (UV-Cured) Surface Treatment:

> 3.5mm (1/8") Wear Layer:

Woodloc® 5S 5 Years Warranty: Installation: Float




Length	Width	Thickness	Boards/Ctn	Area	Weight	Ctn/Pallet	Pallets/Cont.
95 3/8"	7 7/8"	11/4"	4	20.882ft²	48lbs	48	16

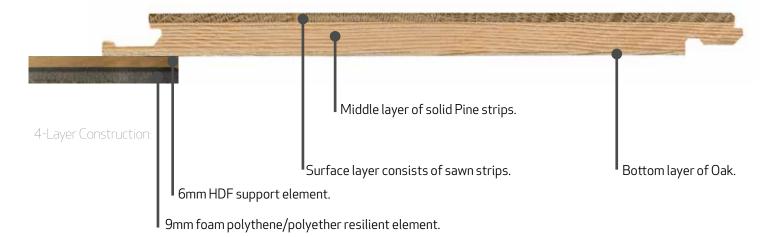

**MOLDINGS & TRANSITIONS** KÄHRS COMPLETE FLOORING SYSTEM

# KÄHRS COMPLETE FLOORING SYSTEM

### **MOLDINGS & TRANSITIONS**



#### **Quarter Round**

Conceals expansion space between the wall and Kährs hardwood flooring. Also used to transition between wood flooring and cabinetry.

All Floors

3/4" x 3/4" x 78"

10lbs

10 pieces

# 31/2

#### Wall Base

Provides an elegant, traditional transition from the flooring to wall. Gives any room a more formal, finished appearance.

All Floors

5/8" x 3 1/2" x 78" 25lbs

5 pieces

# 1/2"

# **T-Molding**


Used in doorways to blend flooring surfaces in adjoining rooms or where floors of the same thickness meet

All Floors


2" x 11/16" x 78"

25lbs

5 pieces



12mm | 13mm | 15mm



#### Square Nose Reducer

Installed against vertical surfaces such as patio doors or fireplace hearths.

Kährs Linnea (7mm) Kährs Spirit (10mm)

11/2" x 3/4" x 78" 10lbs

5 pieces

Kährs Avanti (12-13mm) Kährs Original (15mm)

11/2" x 7/8" x 78" 10lbs

5 pieces


#### Threshold

Ideal for doorways or to transition between floors of different heights. Used with wood, tile or carpet.


Kährs Linnea (7mm) Kährs Spirit (10mm) Kährs Avanti (12mm & 13mm) Kährs Original (15mm) 2" x 3/4" x 78" 2" x 7/8" x 78"

10lbs 10lbs 10 pieces 5 pieces

7mm | 10mm



#### 12mm | 13mm | 15mm




#### **Overlap Reducer**


Used with floating floor applications to provide a smooth transition between floors of different heights. Overlap profile allows the installed flooring to expand and contract.

Kährs Linnea (7mm) Kährs Spirit (10mm) Kährs Avanti (12mm & 13mm) Kährs Original (15mm)

1/2" x 3/8" x 78" 2" x 3/4" x 78" 23/8" x 3/4" x 78" 10lbs 10lbs 10lbs

5 pieces 5 pieces 5 pieces





#### **Transition Profile**

# **Setback Distance**


T-Molding 7mm, 10mm	11/.
T-Molding 12mm, 13mm, 15mm	11/.
Square Nose 7mm, 10mm	7/8
Square Nose 12mm, 13mm, 15mm	11/-
Threshold 7mm, 10mm	3/8
Threshold 12mm, 13mm, 15mm	13/
Overlap Reducer 7mm	13/
Overlap Reducer 10mm	21/
Overlap Reducer 12mm, 13mm, 15mm	21/

/2" /2" /8" 1/4" 1/4" /8" 3/8" . 3/8" . 1/8″ . 1/4″ MOLDINGS & TRANSITIONS KÄHRS COMPLETE FLOORING SYSTEM KÄHRS COMPLETE FLOORING SYSTEM


# Overlap Stair Nosings

Kährs Linnea (7mm)	2" x 13/16" x 78"	20lbs	5 pieces
Kährs Spirit (10mm)	3" x 13/16" x 78"	20lbs	5 pieces
Kährs Avanti & Kährs Original (12mm, 13mm, 15mm)	3" x 13/16" x 78"	20lbs	5 pieces


#### 7mm



# 10mm




# 12mm | 13mm | 15mm




# Woodloc® Stair Nosings

Kährs Spirit (10mm) Kährs Avanti (12mm)	23/4" x 3/4" x 78" 23/4" x 3/4"x 78"	20lbs 20lbs	5 pieces 5 pieces
Kährs Avanti (13mm)	3" x 13/16" x 78"	20lbs	5 pieces
Kährs Original (15mm)	3" x 13/16" x 78"	20lbs	5 pieces
Kährs Original (Artisan 15mm)	37/20" x 4/5" x 78"	20lbs	5 pieces


# 10mm




#### 12mm




#### 13mm



#### 15mm

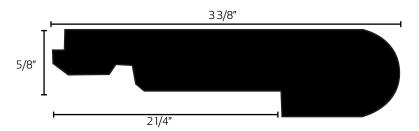

#### 15mm Artisan



MOLDINGS & TRANSITIONS

**UNDERLAYMENTS** KÄHRS COMPLETE FLOORING SYSTEM

# Kährs Combo System

	100ft²Roll	630ft <sup>2</sup> Roll
Roll Length:	30'	189'
Roll Width:	40"	40"
Thickness:	1/8"	1/8"
Roll Weight:	3lbs 3oz	21lbs
Roll Diameter:	7 1/8"	161/2"
ltem Number:	710100	710107

STC = 67 IIC = 68 Sound Ratings

- Helps level the subfloor
- Provides moisture barrier/ventilation
- Compressibility-holds its shape under heavy loads
- Guarantee-meets requirements for Kährs Lifetime Guarantee
- Mold reducing, inert and non-reactive construction • Lightweight with Integrated overlap seal
- Ideal for radiant heat



#### Kährs Eco+

	100ft²Roll	450ft <sup>2</sup> Roll (Special Order)
Roll Length:	33′ 4″	75"
Roll Width:	3'	6'
Thickness:	1/8"	1/8"
Roll Weight:	16lbs	74lbs
Roll Diameter:	7"	11"
Item Number:	711100	711450 (Special Order)

Sound Ratings STC = 67 IIC = 73

- Excellent acoustical performance
- 100% high density memory foam
- Premium polyurethane construction
- Guaranteed over radiant heat
- UL GreenGuard GOLD certified
- Breathable moisture barrier / Up to 10lbs moisture emission
- Ultra-fresh antimicrobial protection
- Free from formaldehyde, latex, PBDE'sMade in part with natural resources
- 100% recyclable
- Eligible for LEED credits




#### Kährs QuietStride

Roll Width: 54" Thickness: 1/8" Roll Weight: 60lbs Roll Diameter: 161/2" Item Number: 710113	Thickness: Roll Weight: Roll Diameter:	1/8" 60lbs 161/2"
--	--	-------------------------

Sound Ratings STC = 61 IIC = 69

- Glue down, floating installations
- Greatly reduces impact and flanking sounds
- Enhances underfoot comfort
- Conseals minor subfloor irregularities
- Always lays flat and will not slip during installation
  Approved for 'double-stick' installations
- 85% recycled tire content and 100% recyclable
  CRI Green Label +PLUS certified
- Contributes to LEED credits
- Guaranteed over radiant heat
- Resists mold, mildew, and fungus growth





MAINTENANCE PRODUCTS



# Kährs Spray Cleaner

32 oz. bottle Kährs Hardwood Floor Cleaner 12 bottles per carton

710280

710526

710553



#### Kährs Floor Care Kit

Maintenance kit containing: dry mop, bottle of Kährs Cleaner, and Kährs Floor Care Guide.

1 kit per carton 5 lbs



SATIN OIL

#### Kährs Satin Oil

No mixing required!!

TO BE USED IMMEDIATELY AFTER INSTALLATION AND PRIOR TO USE OF THE FLOOR

Apply a thin layer of Kährs Satin Oil on the surface and spread it evenly with a Kährs Micro Fiber Mop or a dry cloth along the grain of the board. Polish again with a new Micro Fiber Mop head after 10-15 minutes so that no residue is left behind. 1 l of Kährs Satin Oil per 2,000ft<sup>2</sup>

1 liter 1lbs

TO ORDER SAMPLES EMAIL - info@kahrs.com

# PRODUCT INDEX

	Α	Grisailles, Oak	163		R
Activity Floor, Beech	223	Groove, Walnut	193	Reef, Oak	181
Activity Floor, Maple	221	Gustaf, Oak	109	reer, oak	101
Activity Floor, Oak	219	dastai, datt	103		S
Alabaster, Ash	89		Н	Sacra, Oak	<b>J</b>
Alloy, Oak	83	Handbörd, Oak	35	Sacra, Gaix	167
Arctic, Oak	179	Hue, Oak	177	Salzburg, European Maple	49
Aspeland, Oak	19	riac, Gaix	17.7	Savannah, Cherry	57
Aspetana, Oak	را		1	Sevede, Oak	33
	В	Impasto, Oak	151	Shade, Oak	169
Barrel, Oak	97	Indossati, Oak	131	Shitake, Oak	100
Bisbee, Oak	137	iridossatt, Oak	اردا	Sittake, Oak	207
Black Copper, Ash	15		J	Siena, Oak	51
Black Silver, Ash	13	Johan, Oak	111	Smoke, Oak	81
Blanche, Oak	99	Johan, Oak	111	Sparuto, Oak	133
Brasilia, Brazilian Cherry	71		K	Statue, Walnut	ככו
Bristle, Oak	155	Kalmar, Ash	61	Statue, Walliut	217
Di Istie, Odk	ככו	Kinda, Oak	23	Strobe, Oak	171
	С	Kiriua, Oak	23	Sture, Oak	171
Camino, Oak	125		L	Suede, Oak	161
Carbon, Oak	165	La Daz Prazilian Chorry	69	Sugar, Oak	101
	129	La Paz, Brazilian Cherry Lava, Oak	79	Jugai, Oak	201
Carob, Maple Casa, Oak	7	Lava, Oak Lecco, Oak	141	Supai, Oak	201
Castle, Oak	215	Limestone, Oak	87	Jupai, Oak	135
Ceriale, Ash	145	Linestone, Oak Linen, Oak	121	Sydney, Jarrah	67
Chalk, Oak	173	Litteri, Oak	121	Sydiley, Jairair	07
Charcoal, Oak	91		М		Т
Chevron Dark Brown, Oak	41	Maison, Oak	5	Taro, Oak	'
Chevron Grey, Oak	37	Manor, Oak	1	raro, Gaix	203
Chevron Light Brown, Oak	39	Mellow, Oak	103	Toronto, Maple	55
Cirrus, Oak	77	Meringue, Oak	205	Tower, Oak	211
Cocoa, Walnut	199	Millstone, Oak	105	Trench, Oak	189
Coffee, Oak	195	Moire, Oak	175	Truffle, Oak	197
Concrete, Oak	123	Montreal, Walnut	59	Tuft, Oak	157
Crater, Oak	191	Möre, Oak	21	Tveta, Oak	31
Creme, Oak	73	More, Gare	21	rveta, dare	51
Curio, Oak	153		N		U
carre, carr		Nature, Red Oak	143	Ulf, Oak	117
	D	Nouveau Gray, Oak	93		
Dome, Oak	209	<i>,</i> , , , , , , , , , , , , , , , , , , ,			٧
Dove, Oak	101		0	Vaila, Ash	
		Olof, Oak	107	,	147
	Е	Opaque, Beech	11	Vedbo, Oak	25
Earth, Oak	127	Orchard, Walnut	187	Verona, Oak	53
Espace, Oak	3	Oyster, Oak	119	Viborg, Beech	65
Etch, Oak	159	, ,		Vista, Oak	17
			Р		
	F	Palazzo Bianco, Oak	47		Υ
Finnveden, Oak	27	Palazzo Fumo, Oak	43	Ydre, Oak	29
Forest, Oak	183	Palazzo Rovere, Oak	45		
Fredrik, Oak	115	Pale, Oak	85		
		Pearl, Oak	9		
	G	Pima, Oak	139		
Garden, Walnut	185	Portofino, Oak	95		
Gate, Oak	213				
Gotha, European Maple	149				
Gotland, Ash	63				
Granite, Oak	75				

TO ORDER SAMPLES EMAIL - info@kahrs.com 231















# WHY KÄHRS?

- SWEDISH QUALITY SINCE 1857
- NO ACCLIMATION NEEDED / NO PRE-DELIVERY
- PASSION FOR GREAT DESIGN
- WOODLOC® NO GAPPING!
- LOWEST CLAIMS IN THE INDUSTRY
- HARMONIOUS ENVIRONMENTAL BALANCE
- SAFE FOR YOU AND YOUR FAMILY
- APPROVED FOR INSTALLATIONS OVER RADIANT HEAT



Kährs Headquarters for the Americas 940 Centre Circle, Suite 1000 Altamonte Springs, Florida 32714 Tel: +1 800 800 5247 | Fax +1 407 260 9933 info@kahrs.com www.kahrsflooring.com